

55180

LED 2x4 DIMMABLE PANEL / 50W

TECHNICAL DATA SHEET

FEATURES



INDOOR LUMINAIRES

LED panels provide smooth glare-free illumination and uniform edge-to-edge light distribution for a clean, modern look. Simple installation; for use in drop ceilings or drywall.

- 0-10V dimming function, dimming range is 10% - 100%
- Hanging apparatus not included.


APPLICATION

Panels are the ideal energy-efficient replacements for fluorescent fixtures in offices, schools, hospitality, healthcare and other commercial and industrial applications.

| SPECIFICATIONS | |
|---------------------|-------------------------------|
| Power Consumption | 50W |
| Input Voltage | 120-277V |
| Power Factor | 0.9 |
| Lumens | 5000 |
| Luminous Efficiency | 100 Lm/W |
| Color Temperature | 5000K |
| CRI | 83 |
| Frame | White |
| Average Life | 50,000 |
| Dimension (Inches) | 47.7"(L) x 23.7"(W) x 0.5"(H) |



DIMENSIONS

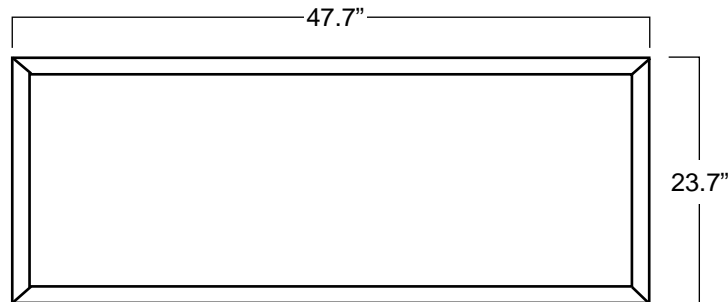

ORDERING

| ITEM# | DESCRIPTION | WATT | COLOR | LUMENS | CRI | VOLT | HOURS | FRAME | CASE |
|-------|--|------|-------|--------|-----|----------|--------|-------|------|
| 55180 | LED 2X4 PANEL 50W/50K/120-277V/DIMMABLE/V4 - SL® DLC | 50 | 5000K | 5000 | 83 | 120-277V | 50,000 | WHITE | 2 |