

# 55182

## LED 2x4 DIMMABLE PANEL / 75W

### TECHNICAL DATA SHEET

#### FEATURES



#### INDOOR LUMINAIRES


LED panels provide smooth glare-free illumination and uniform edge-to-edge light distribution for a clean, modern look. Simple installation; for use in drop ceilings or drywall.

- 0-10V dimming function, dimming range is 10% - 100%
- Hanging apparatus not included.

#### APPLICATION

Panels are the ideal energy-efficient replacements for fluorescent fixtures in offices, schools, hospitality, healthcare and other commercial and industrial applications.

#### DIMENSIONS

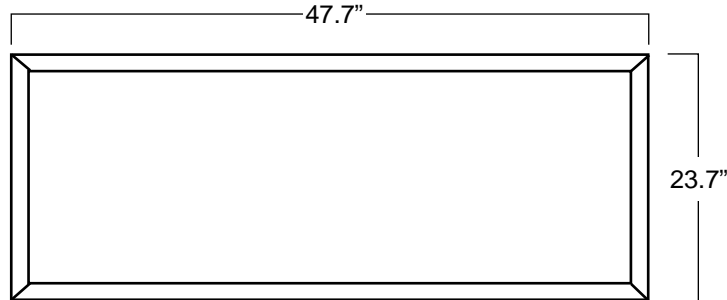

#### ORDERING

ITEM#	DESCRIPTION	WATT	COLOR	LUMENS	CRI	VOLT	HOURS	FRAME	CASE
55182	LED 2X4 PANEL 75W/40K/120-277V/DIMMABLE/V4 - SL® DLC	75	4000K	7116	83	120-277V	50,000	WHITE	2

Please check DLC website for the most current list of approved items • [www.designlights.org](http://www.designlights.org)  
Published lumens on LED products are approximate and may vary slightly.

#### SPECIFICATIONS

Power Consumption	75W
Input Voltage	120-277V
Power Factor	0.9
Lumens	7116
Luminous Efficiency	95 Lm/W
Color Temperature	4000K
CRI	83
Frame	White
Average Life	50,000
Dimension (Inches)	47.7"(L) x 23.7"(W) x 0.5"(H)

