

SURFACE MOUNT DOWNLIGHT PRODUCT FEATURES

Edge Lighting Technology




- BACK PLATE
- WATERPROOF FOAM
- EDGE LIGHTING REFLECTOR
- REFLECTOR
- LIGHT GUIDE PLATE
- SootheOptic LOW GLARE
- TRIM

The CLICK DESIGN SURFACE MOUNT SQUARE & ROUND DOWNLIGHTS use the latest in edge lighting technology to produce a smooth uniform lighting effect. These naturally low glare downlights integrate seamlessly into all ceiling applications.

SootheOptic Low Glare Technology




Glare Control Diffuser



2.4mm Hex Pattern

Viewing Angle

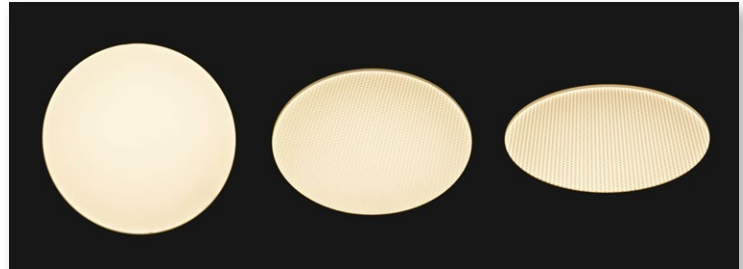

0°

45°


>65°

These downlights all feature SootheOptic technology that reduces high-angle light and minimizes visual glare. The smooth low glare diffuser gives each luminaire a soft cutoff without visible color separation.

Dual Installation

4" J-BOX FLUSHMOUNT

For all models



ACCESSORIES INCLUDED:

- Attach mounting bracket to J-box
- Click downlight into mounting bracket



Mounting Bracket




J-Box Screws



Wire Nuts



LED Adapter



4" & 6" CAN RECESSED

4" CAN - 5.5" & 7" models
6" CAN - 7" model only

ACCESSORIES SOLD SEPARATELY:

- Connect E26 adapter to the LED adapter
- Insert mounting clips and push downlight up until flush with ceiling



E26 Adapter



Mounting Clips



Ground Screw



LED Adapter

SURFACE MOUNT CEILING SERIES

9", 7" & 5.5" SQUARE SURFACE MOUNT DOWNLIGHTS



9" 20W


7" 15W

5.5" 10W



- Dimmable
- 9" 1200lm / 7" 850lm / 5.5" 550lm
- High CRI 90, R9 50 & R13 90
- Low glare
- Wet location rated
- 2700K / 3000K / 4000K CCT
- 50,000-hr lifetime

9", 7" & 5.5" ROUND SURFACE MOUNT DOWNLIGHTS

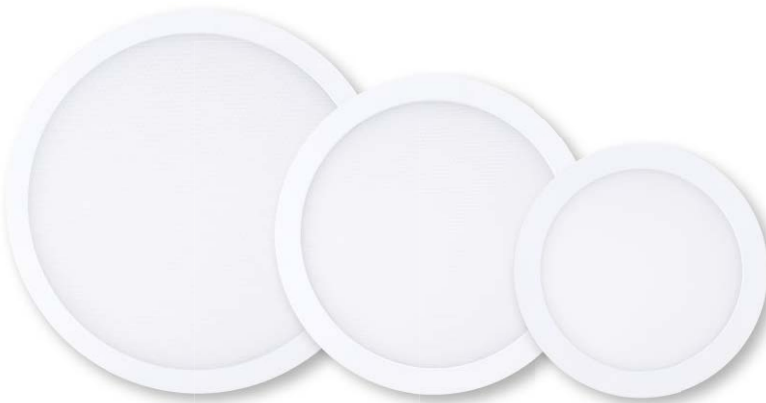

9" 20W

7" 15W

5.5" 10W



- Dimmable
- 9" 1200lm / 7" 850lm / 5.5" 550lm
- High CRI 90, R9 50 & R13 90
- Low glare
- Wet location rated
- 2700K / 3000K / 4000K CCT
- 50,000-hr lifetime

High CRI & Wet Location Rated











LM 79

LM 80

TM 21



Specifications

Model	Product	CCT	Power (W)	Lumens (lm)	Equiv.	LPW	Beam Angle	CRI (typ.)	Dim	Life (hrs)	Voltage	
 SMPS 9\" 20W	20SMPS9DIM/930	58242	3000K	20	1200	100W	60	100°	90	Yes	50,000	120V
	20SMPS9DIM/940	58243	4000K	20	1250	100W	63	100°	90	Yes	50,000	120V
 SMPS 7\" 15W	15SMPS7DIM/927	58244	2700K	15	850	75W	57	100°	90	Yes	50,000	120V
	15SMPS7DIM/930	58245	3000K	15	850	75W	57	100°	90	Yes	50,000	120V
	15SMPS7DIM/940	58246	4000K	15	870	75W	58	100°	90	Yes	50,000	120V
 SMPS 5.5\" 10W	10SMPS5.5DIM/927	58247	2700K	10	550	50W	55	100°	90	Yes	50,000	120V
	10SMPS5.5DIM/930	58248	3000K	10	550	50W	55	100°	90	Yes	50,000	120V
	10SMPS5.5DIM/940	58249	4000K	10	560	50W	56	100°	90	Yes	50,000	120V
 SMPR 9\" 20W	20SMPR9DIM/930	58255	3000K	20	1200	100W	60	100°	90	Yes	50,000	120V
	20SMPR9DIM/940	58256	4000K	20	1250	100W	63	100°	90	Yes	50,000	120V
 SMPR 7\" 15W	15SMPR7DIM/927	58257	2700K	15	850	75W	57	100°	90	Yes	50,000	120V
	15SMPR7DIM/930	58258	3000K	15	850	75W	57	100°	90	Yes	50,000	120V
	15SMPR7DIM/940	58259	4000K	15	870	75W	58	100°	90	Yes	50,000	120V
 SMPR 5.5\" 10W	10SMPR5.5DIM/927	58260	2700K	10	550	50W	55	100°	90	Yes	50,000	120V
	10SMPR5.5DIM/930	58261	3000K	10	550	50W	55	100°	90	Yes	50,000	120V
	10SMPR5.5DIM/940	58262	4000K	10	560	50W	56	100°	90	Yes	50,000	120V

Accessory Ordering Information

Model	Product	Description
SMP/ACC	58033	4" or 6" Recessed Can Accessories for 5.5" & 7" Round & Square (5.5" for Use in 4" Can Only, 7" for Use in 4" or 6" Can)