

HLF-150HSW-L-X-XXX-XXXX


LED MEDIUM WALL PACK - SEMI CUTOFF

IP54

Environment Temperature
-30°F ~ +130°F

Environment Humidity
≤95%

Lifespan
50,000hrs

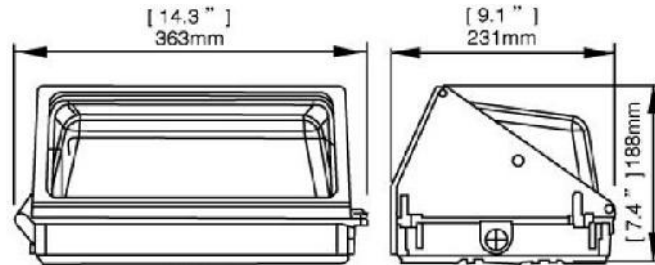

40W LED Wall Pack Products Specification

FEATURES

- Replace up to 175Watt Metal Halide
- Universal 120-277V
- Mercury Free: no UV
- Heavy-duty cast aluminum housing; rust and corrosion proof; polyester powder coating
- High light transmittance borosilicate glass
- Multiple knockouts for mounting convenience
- Die-cast aluminium wall bracket with 1/2" conduit openings with plugs for conduit mounting
- 4KV surge protector inside of power supply
- Occupancy and bi-level power supply compatible
- LM-79/80 data available
- 5 Year Limited Warranty

CONSTRUCTION

- Fixture: Heavy-duty die casting aluminium housing polyester powder coating;
- Lens: High light transmittance polycarbonate
- Diffusor: High light transmittance borosilicate
- LEDs: Top grade LED, high-output, long-life; CREE, SEOUL, SAMSUNG and so on
- Heat Sink: Aluminium plate attach to the Housing and LEDs to act the whole fixture as the heat sink system to reduce LED heats and add to life.
- LED Driver: IP65/ Constant current meets UL1310 UL 48 Class 1
- Finish: Dark Bronze or white finish.. Environmentally friendly polyester powder coatings
- Mounting: Heavy-duty cast aluminum housing; rust and corrosion proof; polyester powder coating

HLF-150HSW-L-X-XXX-XXXX

LED MEDIUM WALL PACK - SEMI CUTOFF

SPECIFICATION

Item No.	Specification	Data
General Performance	Input Wattage	40W
	Initial Lumens	3023
	Efficacy	73
	Input Voltage	120-277V/50-60HZ
	CRI	70
	CCT	5000K
	Power Factor	≥0.95
	THD	≤15%
	Driver Type	Constant Current / Class 1
	Surge Protector	4KV inside of Driver
	Luminaire Life	50000HRS
Physical	Dimension	14.3"x9.1"x7.4"
	Weight	9.6 lbs (4.35kg)
Operation Condition	Operating Temperature	-30°F ~ +130°F
	Humidity	≤95%
Certificate	Certification	ETL,cETL, ,FCC,LM79,LM80
	Environment	Suitable for Wet Location
	Material	Rohs compliant

HOLLY LITE

LED lighting facts®

A Program of the U.S. DOE

Light Output (Lumens) **3023**
Watts **41.23**
Lumens per Watt (Efficacy) **73**

Color Accuracy **70**
Color Rendering Index (CRI)

Light Color
Correlated Color Temperature (CCT) **5023 (Daylight)**


2700K 3000K 4500K 5023K 6500K

All results are according to IEC/EN 12799:2007: Approved Method for the Electrical and Photometric Testing of Solid State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: KEKG-NMUDR (7/22/2013)
 Model Number: HLF-150HSW-L-X-XXX-XXXX
 Type: Outdoor wall-mounted porch lights

PHOTOMETRY

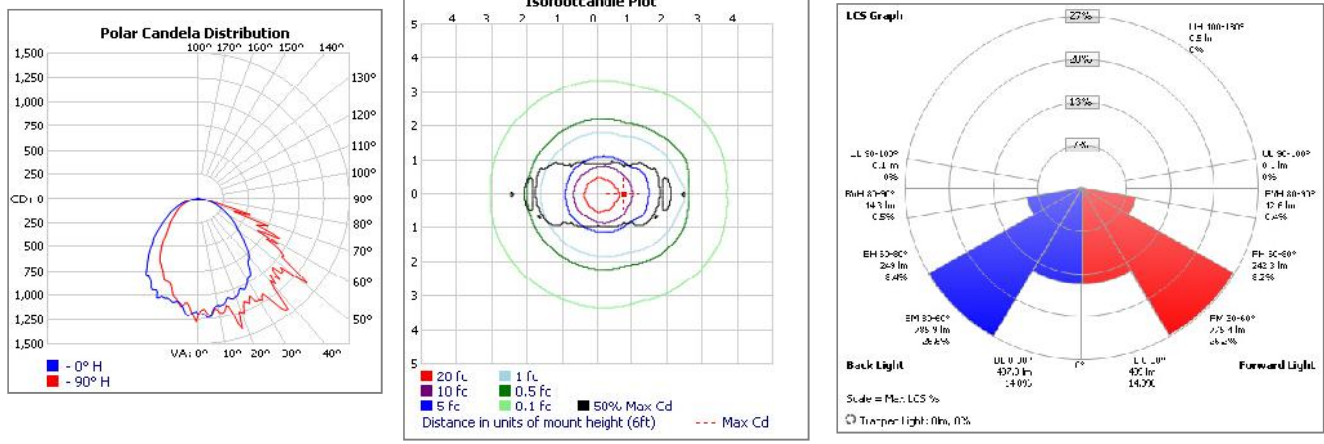

Zone	Lumens	% Lamp	% Luminaire
0-30	876.3	29.6%	29.6%
0-40	1,428.6	48.3%	48.3%
0-60	2,437.3	82.4%	82.4%
60-90	510.2	17.5%	17.5%
90-100	184.8	6.3%	6.3%
90-120	0.2	0%	0%
0-90	2,955.5	100%	100%
90-180	0.6	0%	0%
0-180	2,956.1	100%	100%

ROADWAY SUMMARY	
Cutoff Classification:	CUTOFF
Distribution:	TYPE I, VERY SHORT
Max Cd, 90 Deg Vert:	3.1
Max Cd, 80 to <90 Deg:	81.4
	Lumens % Lamp
Downward Street Side:	1,469.4 49.7%
Downward House Side:	1,486.5 50.3%
Downward Total:	2,955.9 100%
Upward Street Side:	0.3 0%
Upward House Side:	0.3 0%
Upward Total:	0.6 0%
Total Lumens:	2,956.4 100%

LUMENS PER ZONE					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	111.2	3.8%	90-100	0.1	0%
10-20	308.1	10.4%	100-110	0.1	0%
20-30	457.1	15.5%	110-120	0.1	0%
30-40	552.3	18.7%	120-130	0.1	0%
40-50	534.2	18.1%	130-140	0.1	0%
50-60	474.5	16.1%	140-150	0.1	0%
60-70	333.5	11.3%	150-160	0.1	0%
70-80	157.8	5.3%	160-170	0.1	0%
80-90	26.9	0.9%	170-180	0.0	0%

LCS TABLE		
BUG RATING	B1 - U1 - G1	
FORWARD LIGHT	LUMENS	LUMENS %
Low(0-30)	439.0	14.9%
Medium(30-60)	775.4	26.2%
High(60-80)	242.3	8.2%
Very High(80-90)	12.6	0.4%
BACK LIGHT		
Low(0-30)	437.3	14.8%
Medium(30-60)	785.9	26.6%
High(60-80)	249.0	8.4%
Very High(80-90)	14.3	0.5%
UPLIGHT		
Low(90-100)	0.1	0%
High(100-180)	0.5	0%
TRAPPED LIGHT:	0	0%


HLF-150HSW-L-X-XXX-XXXX

LED MEDIUM WALL PACK - SEMI CUTOFF

WIRING

Universal voltage driver permits operation at 100V to 277VAC, 50 or 60Hz except fixtures factory ordered with a 120V photocell (/PC).

1. Connect the black fixture lead to the (L) LINE supply lead.
2. Connect the white fixture lead to the (N) COMMON supply lead.
3. Connect the bare copper Ground wire from fixture to supply lead.

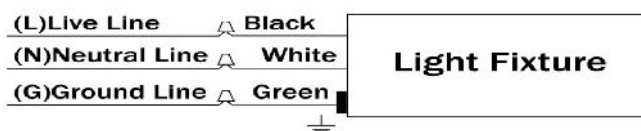

Wiring diagram