




GLOBES G25

BENEFITS

- Up to 88% more efficient than incandescent equivalent
- Longer life and lower maintenance costs
- Dimmable when used with approved dimming switch
- Mercury and Lead free, as well as UV and IR free
- Instant on to full brightness

SPECIFICATIONS

EQUIVALENT	60 Watt Incandescent
AVERAGE RATED LIFE	25,000 hrs
HOUSING	Plastic
BASE	Medium (E26)
POWER	120V, 60Hz
LENS	Frosted
BEAM	Omni
COLOR (K)	3000, 4000, 5000

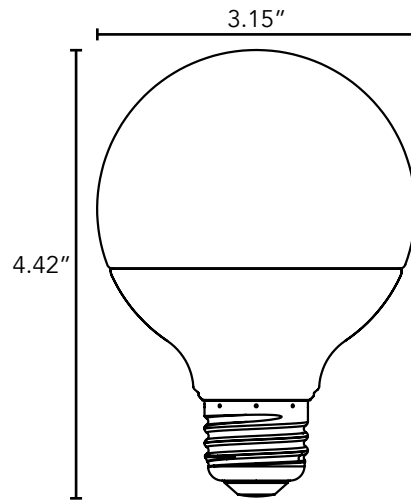

DIMMER COMPATIBILITY*

Lutron: MACL-153M, LGCL-153PLH, TAL06P-C1-K-L, TGCL-153PH, AYCL-153P, DVCL-153P, DVSCCL-153P, SCL-153P, MSCL-OP153M, CTCL-153P, TTCL-100, SELV-300P, DVELV-300P **Cooper:** ASPIRE-9573, DEVINE-DLC03P, SKYE-SLC03P, SAL06P, AAL06-C1-K-L, DAL06P-C1-K-L

*The listed dimmers have been tested and proven to work under limited laboratory conditions. All possible electrical conditions cannot be accurately simulated, and therefore some discrepancy may exist.

APPLICATION INFORMATION

Applications	Market Segments
- Decorative	- Residential
- Bathroom Vanity	- Hospitality
- Theatrical	

Application Notes

1. Operating temperature range between -20°C and +45°C (-4°F and +113°F)
2. Not for use with emergency light fixtures or exit lights
3. Not for use in totally enclosed fixture
4. Suitable for damp locations

This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

CERTIFICATIONS



Based on 12 hours of use per day.

ORDERING INFORMATION

G25

Order Code	Part Number	Wattage (W)	Voltage (V)	Base	Equivalent (W)	CCT ¹	Typical Lumens ²	CRI ³	Dim	Weight (lbs)	Case Quantity	Energy Star
K9R0	G25-60-30	7	120	E26	60W G25	3000K	500	>80	YES	0.2	30	YES
K9R1	G25-60-40	7	120	E26	60W G25	4000K	500	>80	YES	0.2	30	YES
K9R2	G25-60-50	7	120	E26	60W G25	5000K	500	>80	YES	0.2	30	YES

1. Thermally stable typical CCT (±10%) 2. Thermally stable typical lumens (±10%) 3. CRI - Color Rendering Index