

Product Specifications



Area Lights

200W Area Light
EL-AL-200
EL-AL-200HV

FEATURES

- Flexible, modular design
- Retrofit Kit available for direct light source replacement
- Multiple choice of optical lenses
- Advanced, vortex air flow thermal management
- Easy, low cost maintenance and repair
- UL, cUL certified to wet location


TYPICAL APPLICATIONS

- Suitable for Road Lighting
- Area Lighting

SPECIFICATIONS

PERFORMANCE	
LED Chip	CREE
Lumen Output (IES)	21,000 lm
Power Consumption	200 W
Efficacy (IES)	105 lm/W
Beam Angle	TYPE III (70/150°)
Color Temperature	5000K
CRI	≥70
Lumen Maintenance	L70>150,000 hours (Calculated Using TM-21 Calculator)
Input Voltage	100-277 V AC(347V/480 VAC Optional)
Power Factor	0.95 minimum
ENVIRONMENTAL	
IP Rating	IP65
Operating Temperature	-30 to 50°C (-22 to 122°F)
Storing Temperature	-40 to 80°C (-40 to 167°F)
Humidity	15% to 95% RH
PHYSICAL	
Dimensions (L×W×H)	400×560×260 mm (15.7×22.0×10.2 in) (Slip Fitter)
Weight	16.3 kg (35.9 lbs) (Slip Fitter)
Mounting Options	Slip Fitter
Fixture Material	Aluminum Alloy
WARRANTY	5 Years

Photometrics

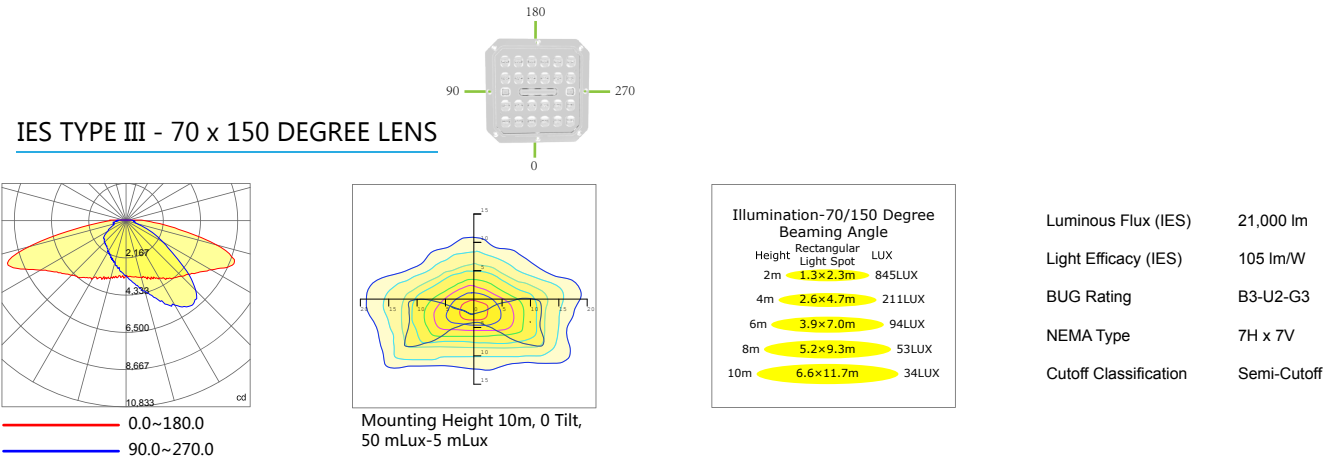

Mounting Options

Slip Flitter

