

### GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 1)
Maximum Wattage	80 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

### CASE STYLE I-PL: METAL



### ELECTRICAL SPECIFICATIONS

Watts	Output Voltage	Max Output Current	Input Voltage	Input Power	Input Current 120/277V	Power Factor	Efficiency	Hatch Part Number
80W	12 VDC	6.60A	120 - 277 VAC	93W	0.86/0.40A	>0.90	86%	LV80-12N-UNV-I-PL

### PRODUCT FEATURES

- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- MTBF: 299,000 hours @ 40°C ambient (~70°C case temp)
- Inrush Current: <20A Max @ 230VAC for Universal input models, cold start 25°C
- Output Voltage tolerance +/- 5% @ 25°C
- No minimum load

### APPROVALS


- UL 8750- Class P
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class A) Non-consumer limits



Type  
HL



### MECHANICAL SPECIFICATIONS: CASE STYLE I-PL

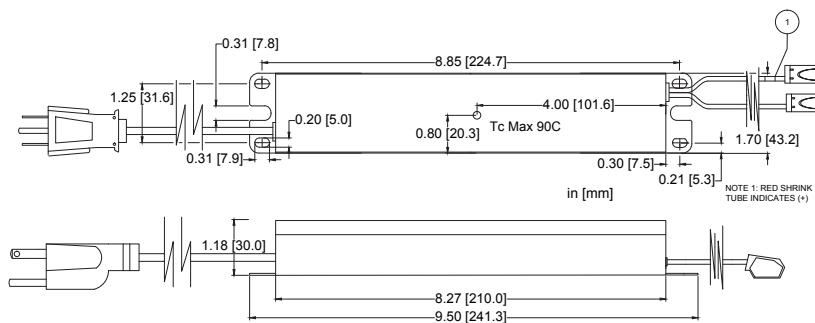

### DIMENSIONS [IN/MM]

Length:	8.85 [224.7]
Mounting:	9.50 [241.3]
Width:	1.70 [43.2]
Height:	1.18 [30.0]

### WIRING INFORMATION

Input:	60" Black Cord 3 x #18AWG, 3 Prong Grounded Male Plug (NEMA 5-515P)
Output:	36" Black 2 x #18AWG with Connectors (Heavy Power PC252), Red Shrink Tube Indicates (+)

### PACKAGING INFORMATION

Weight:	21.2 oz
Quantity:	30pc/carton

### WARRANTY

- 5 year limited warranty