

LED

WALL PACKS



FEATURES

- System Light Efficacy 81 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL, DLC(4000K Only)
- Optional Shade Included for Field Installation



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10700	4000	4860	80	60	120-277	YES	WALL	54000	5 years
-----------	------	------	----	----	---------	-----	------	-------	---------

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 81 LPW
- Optional Shade Included for Field Installation

TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

WARRANTY

WARRANTY **5 Years**

SPECIFICATIONS

PERFORMANCE

Lightning T3C LED Chip
4860 Lumen Output (IES)
60W Power Consumption
81lm/W Efficacy (IES)
4000K Color Temperature
≥80 CRI
L70>54,000 hours Lumen Maintenance
120-277 VAC Input Voltage
0.95 minimum Power Factor

ENVIRONMENTAL


IP65 Rating
-30 to 45°C Operating Temperature

PHYSICAL


Dimensions (432 x 230 x 430mm)
Weight 9.0kg
Wall Mounting Options
Fixture Material Aluminum Alloy



PHOTOMETRICS

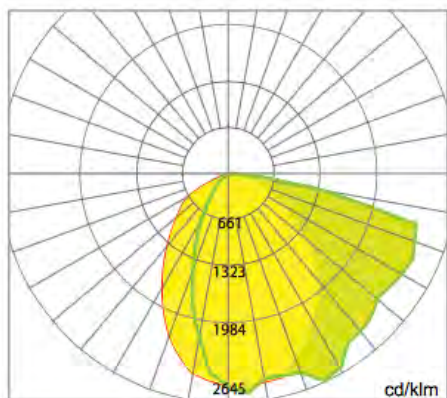

0.0~180.0

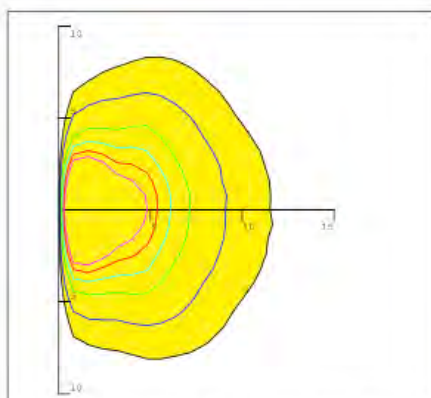

Mounting Hight 4m, 0 Tilt,
50LUX-5LUX

Illumination

Height	Light Spot	LUX
4m	7×7m	131LUX
4.5m	8×8m	103LUX
5m	10×10m	83LUX
5.5m	11×11m	69LUX
6m	13×13m	58LUX