

LED WALL PACKS



FEATURES

- System Light Efficacy 81 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL
- Optional Shade Included for Field Installation



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-10701	4000	7290	80	90	120-277	YES	WALL	54,000	5 years

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 81 LPW
- Optional Shade Included for Field Installation

TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

WARRANTY

WARRANTY **5 Years**

SPECIFICATIONS

PERFORMANCE

Lightning T3C LED Chip
 7290 Lumen Output (IES)
 90W Power Consumption
 81lm/W Efficacy (IES)
 4000K Color Temperature
 ≥80 CRI
 L70>54,000 hours Lumen Maintenance
 120-277 VAC Input Voltage
 0.95 minimum Power Factor

ENVIRONMENTAL


IP65 Rating
 -30 to 45°C Operating Temperature

PHYSICAL


Dimensions (432 x 230 x 430mm)
 Weight 10.4kg
 Wall Mounting Options
 Fixture Material Aluminum Alloy



PHOTOMETRICS

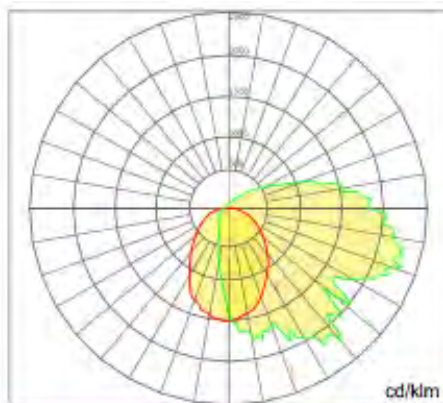

0.0~180.0

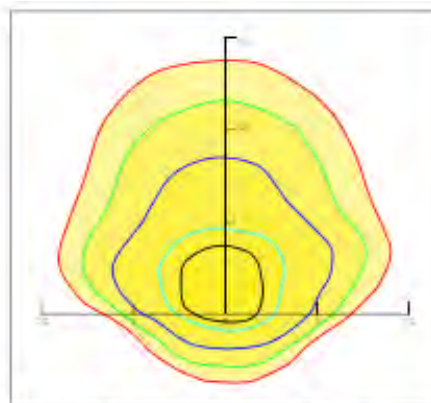

Mounting Hight 4m, 0 Tilt,
 50LUX-5LUX

Illumination

Height	Light Spot	LUX
2m	3.7x5.7m	377LUX
4m	7.5x82.6m	94LUX
6m	11.2x17.1m	42LUX
8m	14.9x22.7m	23.5LUX
10m	18.7x28.4m	15LUX