



OLWX1 LED

LED Wall Luminaire




Specifications

Width: 7-1/2"
(19 cm)

Height: 8"
(20.3 cm)

Depth: 3"
(7.62 cm)

Weight: 5 lbs
(2.27 kg)

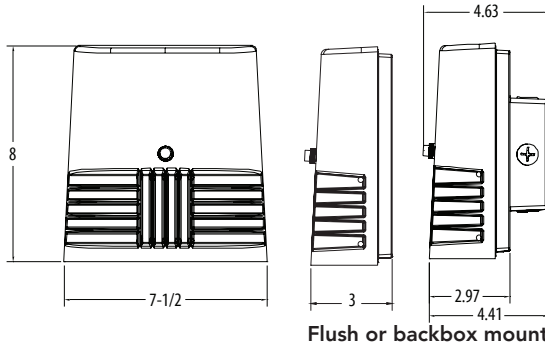

Introduction

As versatile as it is efficient, the OLWX1 is designed to replace up to 250W metal halide while saving over 87% in energy costs. It combines multiple mounting options with the latest generation of LEDs for a wall pack luminaire that converts to a whole lot more. Whether you are mounting it to a recessed junction box, conduit/through wiring, as an up light, as a down light, or as a flood light – the OLWX1 has you covered.

Ordering Information

EXAMPLE: OLWX1 LED 20W 50K

| OLWX1 LED | | Performance Package | | Color Temperature | | Voltage | | Controls | | Finish | | |
|-----------|-----|---------------------|-----|---------------------|---------|--------------------|---------|----------|---------|-------------|-------------------|----|
| Series | | | | | | | | | | | | |
| OLWX1 LED | 13W | 13 watts | 40K | 4000 K ¹ | (blank) | MVOLT ² | (blank) | None | (blank) | Dark bronze | | |
| | 20W | 20 watts | | 50K | | 5000 K | | 120 | | | 120V ³ | PE |
| | 40W | 40 watts | | | | 347 | | 347V | | | | |

Accessories

Ordered and shipped separately.

OLWX1TS Slipfitter – size 1

OLWX1YK Yoke – size 1

OLWX1THK Knuckle – size 1

NOTES

- Not available with 347V option.
- MVOLT driver operates on any line voltage from 120-277V (50/60Hz).
- Specify 120V when ordering with photocell (PE option).

FEATURES & SPECIFICATIONS

INTENDED USE

The versatility of the OLWX1 LED combines a sleek, low-profile wall pack design and high-output LEDs to provide an energy efficient, low maintenance LED wall pack suitable for replacing up to 250W metal halide fixtures. Available flood light mounting accessories convert the OLWX1 LED into a highly efficient flood light.

OLWX1 LED is ideal for outdoor applications such as building perimeters, loading areas, driveways and sign and building flood lighting.

CONSTRUCTION

Rugged cast-aluminum housing with textured dark bronze polyester powder paint for lasting durability. Integral heat sinks optimize thermal management through conductive and convective cooling. LEDs are protected behind a glass lens. Housing is sealed against moisture and environmental contaminants (IP65).

OPTICS

High-performance LEDs behind clear glass for maximum light output. Light engines are available in 4000K and 5000K CCTs. See Lighting Facts label and photometry reports for specific fixture performance.

ELECTRICAL

Light engine consists of 1 high-efficiency Chip On Board (COB) LED with integrated circuit board mounted directly to the housing to maximize heat dissipation and promote long life (L73/100,000 hours at 25°C). Electronic drivers have a power factor >90% and THD <20% and a minimum 2.5kV surge rating. Flood light mounting accessories include an additional 6kV surge protection device.

INSTALLATION

Easily mounts to recessed junction boxes with the included wall mount bracket, or for surface mounting and conduit entry - with the included junction box with five 1/2" threaded conduit entry hubs. Flood light mounting accessories (sold separately) include knuckle, integral slipfitter and yoke mounting options. Each flood mount accessory comes with a top visor and vandal guard. Luminaire may be wall or ground mounted in downward or upward orientation.

LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations. Rated for -40° C minimum ambient. Tested in accordance with IESNA LM-79 and LM-80 standards. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Full warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts.

| Fixture Model Number | CCT | System Watts | Lumens | LPW | B | U | G | CRI |
|----------------------|--------|--------------|--------|-----|---|---|---|-----|
| OLWX1 LED 13W 40K | 4000 K | 14 W | 1,271 | 91 | 1 | 0 | 0 | >70 |
| OLWX1 LED 13W 50K | 5000 K | 14 W | 1,289 | 92 | 1 | 0 | 0 | >80 |
| OLWX1 LED 20W 40K | 4000 K | 22 W | 1,854 | 84 | 1 | 0 | 0 | >70 |
| OLWX1 LED 20W 50K | 5000 K | 22 W | 1,860 | 84 | 1 | 0 | 0 | >80 |
| OLWX1 LED 40W 40K | 4000 K | 39 W | 4,027 | 101 | 2 | 0 | 0 | >70 |
| OLWX1 LED 40W 50K | 5000 K | 37 W | 4,079 | 110 | 2 | 0 | 0 | >70 |

Electrical Load

| Fixture Model Number | Rated Power (watts) | Input current at given input voltage (amps) | | | | |
|----------------------|---------------------|---|------|------|------|------|
| | | 120V | 208V | 240V | 277V | 347V |
| OLWX1 LED 13W 40K | 14 W | 0.12 | 0.07 | 0.06 | 0.06 | 0.04 |
| OLWX1 LED 13W 50K | 14 W | 0.12 | 0.07 | 0.06 | 0.06 | 0.04 |
| OLWX1 LED 20W 40K | 22 W | 0.20 | 0.12 | 0.10 | 0.09 | 0.06 |
| OLWX1 LED 20W 50K | 22 W | 0.20 | 0.12 | 0.10 | 0.09 | 0.06 |
| OLWX1 LED 40W 40K | 39 W | 0.37 | 0.21 | 0.19 | 0.16 | 0.11 |
| OLWX1 LED 40W 50K | 37 W | 0.37 | 0.21 | 0.19 | 0.16 | 0.11 |

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| | 0°C | 10°C | 20°C | 25°C | 30°C | 40°C |
|-----|------|------|------|------|------|------|
| 13W | 1.06 | 1.03 | 1.01 | 1.00 | 0.99 | 0.96 |
| 20W | 1.06 | 1.04 | 1.01 | 1.00 | 0.99 | 0.96 |
| 40W | 1.07 | 1.04 | 1.01 | 1.00 | 0.99 | 0.96 |

Projected LED Lumen Maintenance


Data references the extrapolated performance projections in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | 0 | 25,000 | 50,000 | 100,000 |
|-----------------|------|--------|--------|---------|
| OLWX1 LED 13W | 1.00 | 0.92 | 0.85 | 0.73 |
| OLWX1 LED 20W | 1.00 | 0.92 | 0.85 | 0.73 |
| OLWX1 LED 40W | 1.00 | 0.94 | 0.88 | 0.79 |

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting OLWX1 LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards

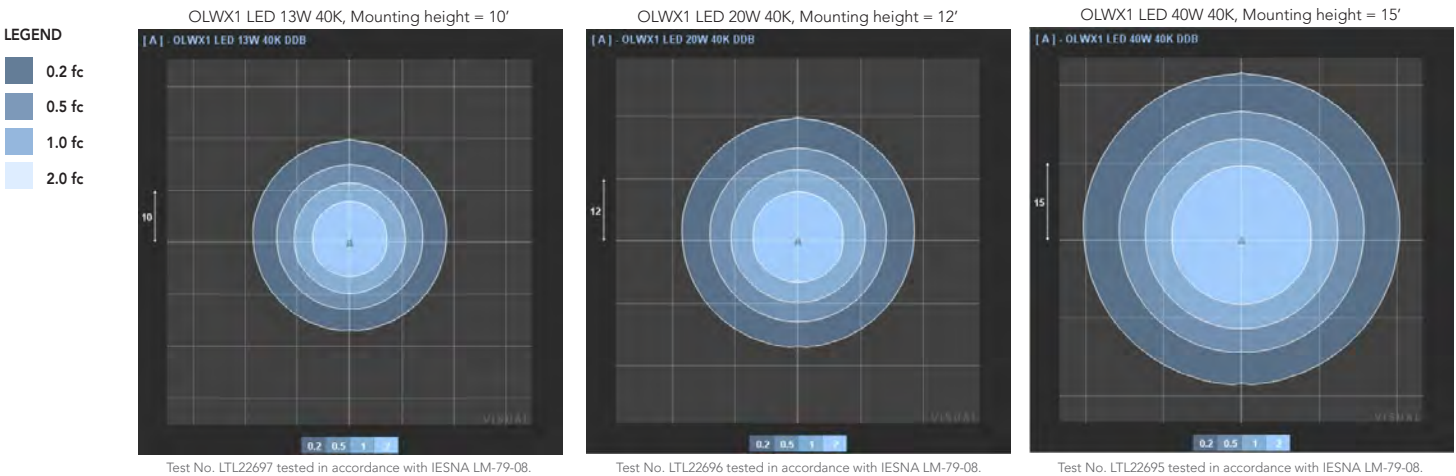

Accessories



OLWX1TS
Slipfitter – size 1



OLWX1YK
Yoke – size 1




OLWX1THK
Knuckle – size 1




Top Visor and Vandal Guard
included with accessories

Lighting Facts Labels


OLWX1 LED 13W 40K XXX XX XXX

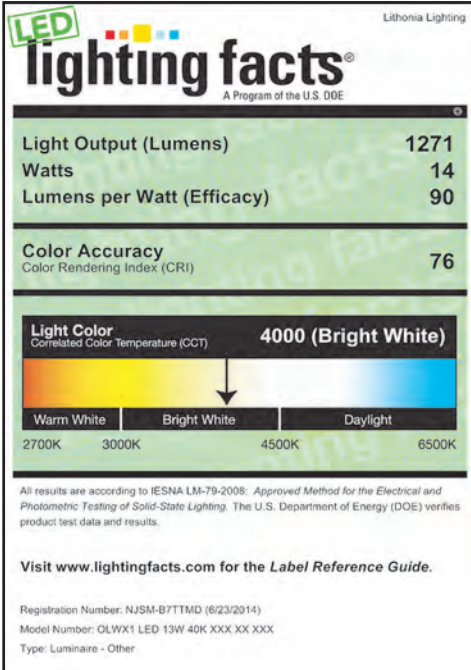


OLWX1 LED 13W 50K XXX XX XXX

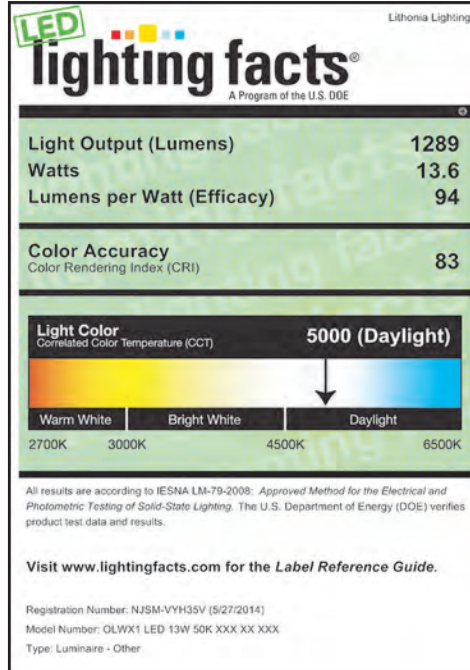


OLWX1 LED 20W 40K XXX XX XXX

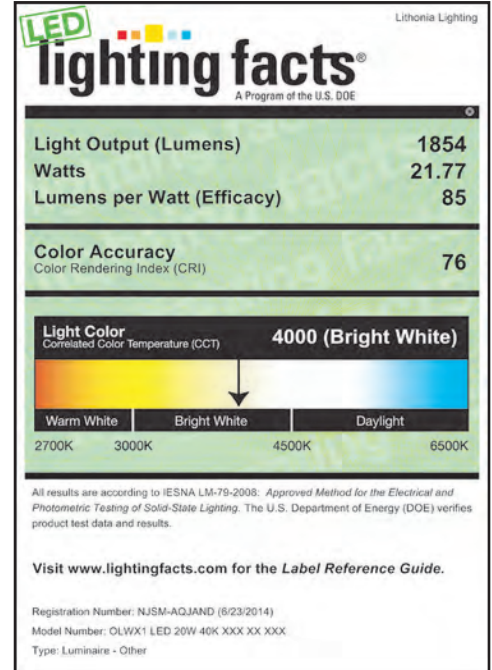

OLWX1 LED 20W 50K XXX XX XXX

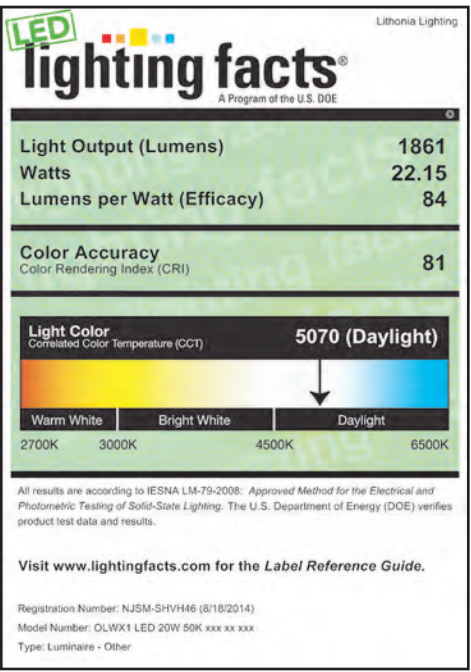

OLWX1 LED 40W 40K XXX XX XXX

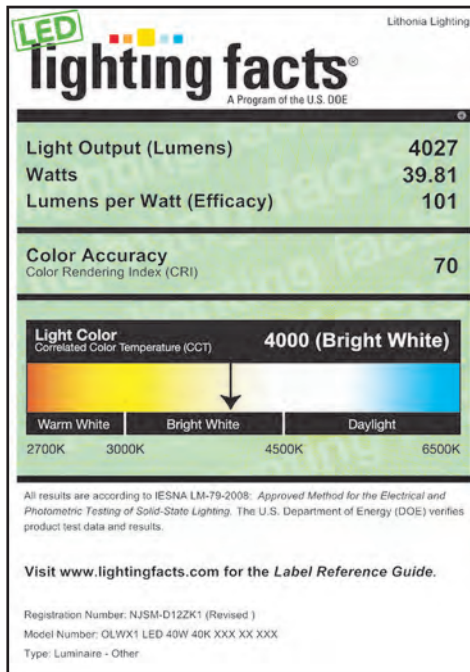

OLWX1 LED 40W 50K XXX XX XXX

