

PAR30L 18.5W



OUTPUT RANGE: VIVID SERIES 930 - 1050 lumen

OUTPUT RANGE: BRILLIANT SERIES 1190 - 1280 lumen

BEAM ANGLE RANGE 9°, 25°, 36°, 60°

COLOR TEMPERATURE RANGE 2700K, 3000K, 4000K, 5000K

APPLICATION Halogen replacement for indoor & outdoor applications



120V



E26



DIM



POINT SOURCE OPTICS

Exceptional beam control enables unique 9° narrow spot and smooth uniform beams

Single light source, single crisp shadow

VP₃ VIVID COLOR & VP₃ NATURAL WHITE

VIVID series provides accurate color rendering across the visible spectrum from 400nm to 700nm, with CRI/95*, R9/95*, Rf/90, Rg/100

Whiteness rendering matches or exceeds that of halogen and incandescent sources at 2700K and 3000K

ENERGY EFFICIENCY & LONG LIFE

85% more energy efficient than standard halogen lamps

Typical payback of one year or less

Rated lifetime of 35,000 hours. 3 year warranty

CERTIFICATIONS

RoHS, CE, UL/CUL, FCC Title 47 Part 15B



RoHS

HIGHLY COMPATIBLE

Narrow spot compatible with Soraa SNAP System accessories

Thermally and geometrically compatible with standard fixtures and suitable for damp locations

Suitable for fully enclosed fixtures. Can be used with front glass cover

Works with trailing edge and leading edge phase cut dimmers (see www.soraa.com/resources)

INTENDED USE AND APPLICATIONS

Intended for use in PAR30L compatible recessed downlights, track lighting and other indoor and outdoor applications

Soraa lamps are designed to safely turn down in any thermal environment not conducive to minimum airflow or proper ventilation

GENERAL SPECIFICATIONS

Form Factor

Width: 96mm (3.78")

Height: 113mm (4.45")

Weight: 295g

Operating Temperature

Minimum: -40°C (ambient)

Typical: 70°C - 80°C (base)

Maximum: 90°C (base)

Electrical

Wattage: 18.5W

Power factor: 0.95

Voltage: 120V +/- 12V

Frequency: 50/60Hz

Dimming and Flicker


Dimmable to <10%

Flicker Index: <0.1

Percent Flicker: 31%


*Metrics apply to 2700K, 3000K, 4000K. 5000K color metrics are CRI/90, R9/95

DIMENSIONS

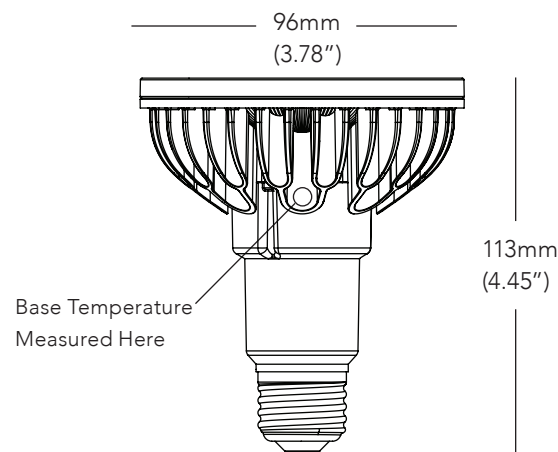


9 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
0.5	0.8	8.6%
0.9	1.7	2.5%
1.4	2.5	1.2%
1.9	3.4	0.7%
2.4	4.2	0.4%

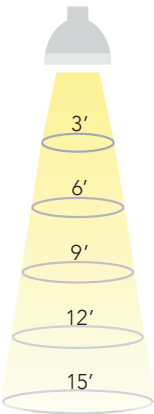


36 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
1.9	3.5	8.6%
3.9	6.9	2.5%
5.8	10.4	1.2%
7.8	13.9	0.7%
9.7	17.3	0.4%

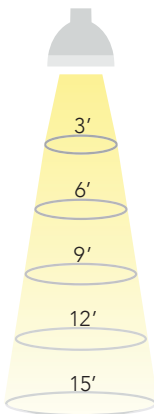

Note: Footcandles may be calculated by multiplying the CBCP of the desired model number by the percentage in the tables above

COLOR RENDERING

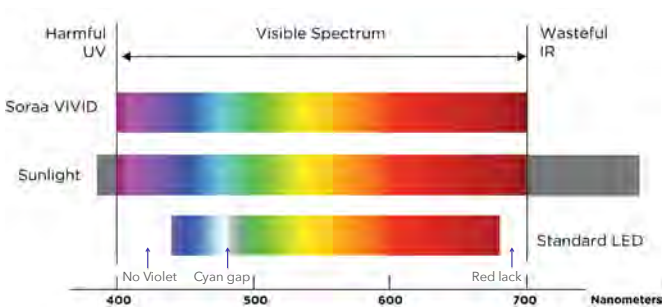

25 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
1.3	2.2	8.6%
2.7	4.4	2.5%
4.0	6.6	1.2%
5.3	8.7	0.7%
6.7	10.9	0.4%

60 DEGREE BEAM

Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
3.5	6.0	8.6%
6.9	12.0	2.5%
10.4	18.0	1.2%
13.9	24.0	0.7%
17.3	30.0	0.4%

SPECIFICATIONS BY MODEL NUMBER* SORAA LED PAR30L 18.5W

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	CBCP (Cd)	Halogen Equivalent	Total Flux (Lm)	Efficacy (Lm/W)	McA	Energy Star	SNAP
VIVID SERIES											
SP30L-18-09D-927-03	00763	2700	9	16	17200	100	930	50	3	YES	YES
SP30L-18-25D-927-03	00765	2700	25	40	5020	100	930	50	3	YES	-
SP30L-18-36D-927-03	00767	2700	36	60	2320	100	930	50	3	YES	-
SP30L-18-60D-927-03	00769	2700	60	90	1020	100	930	50	3	YES	-
SP30L-18-09D-930-03	00779	3000	9	16	18500	100	1000	54	3	YES	YES
SP30L-18-25D-930-03	00781	3000	25	40	5400	100	1000	54	3	YES	-
SP30L-18-36D-930-03	00783	3000	36	60	2500	100	1000	54	3	YES	-
SP30L-18-60D-930-03	00785	3000	60	90	1100	100	1000	54	3	YES	-
SP30L-18-09D-940-03	00795	4000	9	16	19240	100	1040	56	4	YES	YES
SP30L-18-25D-940-03	00797	4000	25	40	5600	100	1040	56	4	YES	-
SP30L-18-36D-940-03	00799	4000	36	60	2600	100	1040	56	4	YES	-
SP30L-18-60D-940-03	00801	4000	60	90	1140	100	1040	56	4	YES	-
SP30L-18-09D-950-03	00803	5000	9	16	19420	100	1050	57	5	-	YES
SP30L-18-25D-950-03	00805	5000	25	40	5660	100	1050	57	5	-	-
SP30L-18-36D-950-03	00807	5000	36	60	2620	100	1050	57	5	YES	-
SP30L-18-60D-950-03	00809	5000	60	90	1140	100	1050	57	5	-	-
BRILLIANT SERIES											
SP30L-18-09D-827-03	00771	2700	9	16	22000	120	1190	64	3	YES	YES
SP30L-18-25D-827-03	00773	2700	25	40	6420	120	1190	64	3	-	-
SP30L-18-36D-827-03	00775	2700	36	60	2960	120	1190	64	3	YES	-
SP30L-18-60D-827-03	00777	2700	60	90	1300	120	1190	64	3	YES	-
SP30L-18-09D-830-03	00787	3000	9	16	23680	120	1280	69	3	YES	YES
SP30L-18-25D-830-03	00789	3000	25	40	6900	120	1280	69	3	YES	-
SP30L-18-36D-830-03	00791	3000	36	60	3200	120	1280	69	3	YES	-
SP30L-18-60D-830-03	00793	3000	60	90	1400	120	1280	69	3	YES	-

CCT: Correlated Color Temperature McA: White Point Accuracy in McA step SNAP: SORAA SNAP System Compatible

*Specifications are at stable warm operating conditions (25°C ambient)


SERIES/CCT

COLOR ACCURACY


WHITENESS INDEX

SPECTRAL POWER DISTRIBUTION


VIVID
2700K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

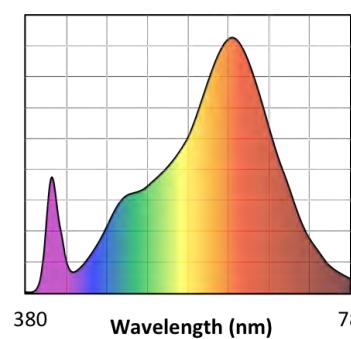


380 Wavelength (nm) 780

CRI: 95, R9: 95


VIVID
3000K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

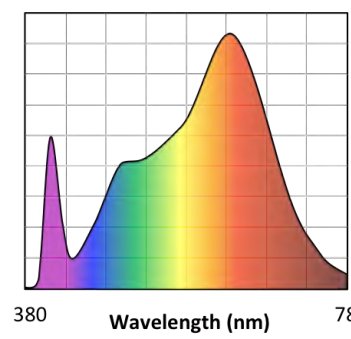


380 Wavelength (nm) 780

CRI: 95, R9: 95


VIVID
4000K



Rf: 90, Rg: 100, Rfh1: 95




Rw: 70

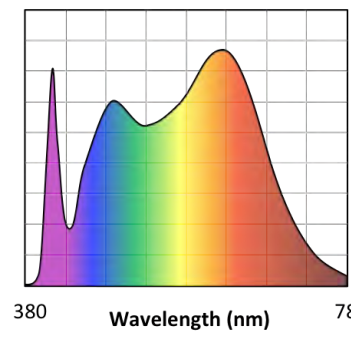


380 Wavelength (nm) 780

CRI: 95, R9: 95


VIVID
5000K



Rf: 90, Rg: 100, Rfh1: 95









Rw: 50

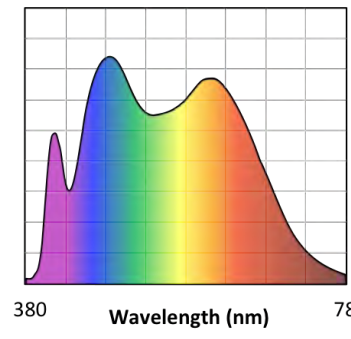

380 Wavelength (nm) 780

CRI: 90, R9: 95

SERIES/CCT	COLOR ACCURACY	WHITENESS INDEX	SPECTRAL POWER DISTRIBUTION
BRILLIANT 2700K	 Rf: 85, Rg: 92, Rfh1: 77	 Rw: 100	 CRI: 85, R9: >0
BRILLIANT 3000K	 Rf: 85, Rg: 92, Rfh1: 77	 Rw: 100	 CRI: 85, R9: >0

Rf: TM-30 metric measuring color fidelity (whether colors are similar to those under natural light). Rf is a more accurate version of the CRI Ra. Rf is 100 for natural light.
 Rg: TM-30 metric measuring color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.
 Rfh1: TM-30 metric measuring color fidelity for red tones. Rfh1 is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.
 Rw: Soraa-developed metric to measure white fidelity. Rw measures the magnitude of excitation of whitening agents within whites. Rw is about 100 for natural light.