



CANDLES

STRAIGHT TIP


BENT TIP

SPECIFICATIONS

EQUIVALENT	45 and 60 Watt Incandescent
AVERAGE RATED LIFE	25,000 hrs
BASE	Candelabra (E12)
POWER	120V, 60Hz
LENS	Frosted
BEAM	320°
COLOR (K)	2700, 3000, 4000, 5000

BENEFITS

- Up to 83% more efficient than incandescent equivalent
- Longer life and lower maintenance costs
- Dimmable when used with approved dimming switch
- Mercury and Lead free, as well as UV and IR free
- Instant on to full brightness

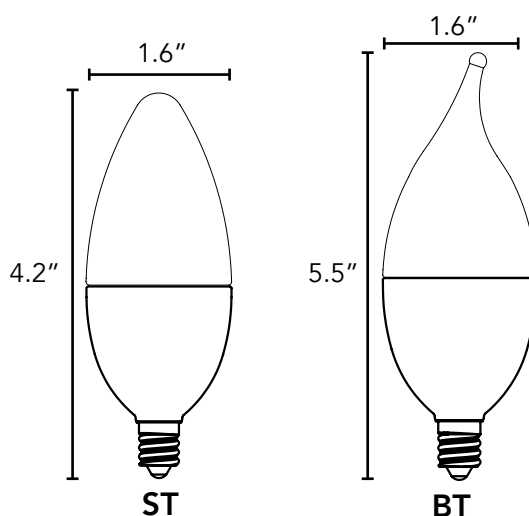

DIMMER COMPATIBILITY*

Lutron: MACL-153M, LGCL-153PLH, TAL06P-C1-K-L, TGCL-153PH, AYCL-153P, DVCL-153P, DVSCCL-153P, SCL-153P, MSCL-OP153M, CTCL-153P, TTCL-100, SELV-300P, DVELV-300P **Cooper:** ASPIRE-9573, DEVINE-DLC03P, SKYE-SLC03P, SAL06P, AAL06-C1-K-L, DAL06P-C1-K-L

*The listed dimmers have been tested and proven to work under limited laboratory conditions. All possible electrical conditions cannot be accurately simulated, and therefore some discrepancy may exist.

APPLICATION INFORMATION

Applications	Market Segments
– Decorative	– Residential
– Chandelier	– Hospitality
– Specialty	– Restaurant

Application Notes

1. Operating temperature range between -20°C and +45°C (-4°F and +113°F)
2. Not for use with emergency light fixtures or exit lights
3. Not for use in totally enclosed fixture
4. Suitable for indoor/damp locations and sheltered outdoor use

This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

CERTIFICATIONS



LM79 reports are available upon request.



Based on 12 hours of use per day.

CANDLES

ORDERING INFORMATION

STRAIGHT TIP

Order Code	Part Number	Wattage (W)	Voltage (V)	Base	Equivalent	CCT ¹	Typical Lumens ²	CRI ³	Dim	Weight (lbs)	Case Quantity	Energy Star [®]
K1S4	CST-60-30	6	120	E12	60W Candle	3000	500	>80	YES	0.15	24	YES
K1S5	CST-60-40	6	120	E12	60W Candle	4000	500	>80	YES	0.15	24	YES
K1S6	CST-60-50	6	120	E12	60W Candle	5000	500	>80	YES	0.15	24	YES

BENT TIP

Order Code	Part Number	Wattage (W)	Voltage (V)	Base	Equivalent	CCT ¹	Typical Lumens ²	CRI ³	Dim	Weight (lbs)	Case Quantity	Energy Star [®]
K8L8	LED-BBT-350-27	6	120	E12	45W Candle	2700	430	>80	YES	0.2	50	-
K8L8-N	LED-BBT-350-27 (350L)	6	120	E12	45W Candle	2700	350	>80	YES	0.2	50	-
K1S7	CBT-60-30	6	120	E12	60W Candle	3000	500	>80	YES	0.15	24	YES
K1S8	CBT-60-40	6	120	E12	60W Candle	4000	500	>80	YES	0.15	24	YES
K1S9	CBT-60-50	6	120	E12	60W Candle	5000	500	>80	YES	0.15	24	YES

For the most up-to-date specifications



Specifications are typical values and may change without notification.
©2016 Kobi Electric, Inc. All Rights Reserved

Candles
Rev 1.1