

INSTALLATION INSTRUCTIONS



NeoSol

IMPORTANT: Read all instructions before performing any work. Be sure to properly mount fixture before plugging in.

WARNING: Luminaire must be plugged into a properly grounded 3-prong 120V outlet. Failure to do so may result in serious injury.


Installation of the NeoSol LS fixture is simple – just hang it up and plug it in!

The NeoSol fixture is designed to be suspended from the ends using chain, lanyards, or specialty adjustable light-fixture hangers. To suspend the fixture, attach one end of the chain, lanyard, or specialty adjustable light-fixture hanger to the hole at each end of the fixture as shown.

Attach the other end of the chain, lanyard, or specialty adjustable light-fixture hanger to whatever hanging point is desired. Insure that the hanging point is strong enough to properly support the weight of the fixture. Do not use the electrical cord to support the weight of the fixture.



Alternately, the fixture may be mounted to a suitable surface (wall, ceiling, shelf, etc.) using the optional “L” brackets.

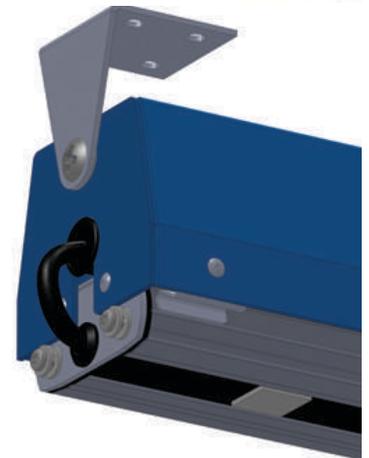

Plug the fixture into a properly grounded, standard 3-prong 120Vac electrical outlet. An automatic timer may be used. Insure that the electrical outlet is not in an area that may be exposed to water during plant watering. The NeoSol fixtures are not designed to be used with dimmers.