


TRACK 22W M HIGH CRI

Preliminary Specifications



DIMENSIONS

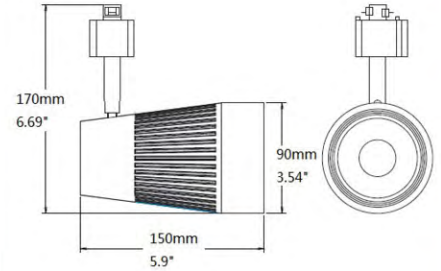

PRO



- ⌚ Exceptional color rendering CRI 90+
- ⌚ 1250 lumen output replaces 20W HID
- ⌚ Field interchangeable lens comes in NF & FL standard
- ⌚ Sleek design, integrated driver
- ⌚ Tight binning: 3-step Macadam ellipse



COMPATIBLE WITH H, J & L TRACK TYPE



TRACK 22W M HIGH CRI

Preliminary Specifications

SPECIFICATIONS*

Product	22TRMG4DIM/927/ / _	22TRMG4DIM/930/ / _	22TRMG4DIM/940/ / _ (MTO)
Track Type	H/J/L (L-MTO)	H/J/L (L-MTO)	H/J/L (L-MTO)
Power (W)	22	22	22
Voltage - Frequency	120V 60Hz	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Warm White 2700K	Warm White 3000K	Natural White 4000K
CRI (Ra) (typ.)	90	90	90
Typical lumens (lm)	1200	1250	1300
Efficacy (LPW)	55	57	59
Beam Angle	NF 25° / FL 38° / SP 15° (opt.)	NF 25° / FL 38° / SP 15° (opt.)	NF 25° / FL 38° / SP 15° (opt.)
CBCP (cd)	6300 / 3250 / 12, 200	6700 / 3450 / 13,000	6900 / 3600 / 13,500
Dimmable	Yes	Yes	Yes
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	40,000	40,000	40,000
H x L x Dia.	6.69"x5.90"x3.54" (170x150x90mm)	6.69"x5.90"x3.54" (170x150x90mm)	6.69"x5.90"x3.54" (170x150x90mm)
Weight (lb. / g)	1.31lb / 595g	1.31lb / 595g	1.31lb / 595g
Finish	White / Black	White / Black	White / Black

Ref.#DS042-TRIM-22W

ORDERING INFORMATION

Model	Finish	Track Type
22TRMG4DIM/927/	W-White	H-Halo
	B-Black	J-Juno
		L-Lightolier
Example: 22TRMG4DIM/927/W/J		
Note: Every product comes standard with NF 25° mounted lens and FL 38° accessory lens. SP 15° lens can be ordered separately.		

* Specification data is preliminary and may be subject to change