




## Wiring Instructions

**WARNING:** Be certain power is removed from power source before beginning wiring procedure.

### Fixture Without Light Sensor

#### 1. Wire Fixture to Power Source

- Connect Black wire from power source (line) to Black wire from LED driver using wire nut.
- Connect White wire from power source (neutral) to White wire from driver using wire nut.
- Connect Green wire from power source (ground) to the fixture housing using an appropriately sized screw (not provided).

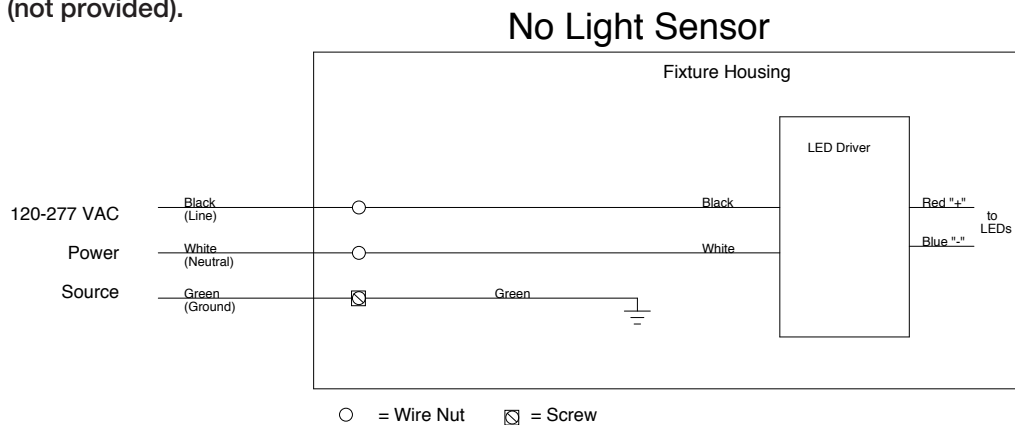


### Fixture With Light Sensor

#### 1. Wire Light Sensor to Driver

- Connect Red wire from light sensor to Black wire of driver using wire-nut.
- Connect White wire from light sensor to White wire of driver.

#### 2. Wire Fixture to Power Source

- Connect Black wire from power source (line) to Black wire from light sensor using wire nut.
- Connect White wire from power source (neutral) to two White wires (1 from driver and 1 from light sensor connected in step 1b above) using wire nut
- Connect Green wire from power source (ground) to the fixture housing using an appropriately sized screw (not provided).

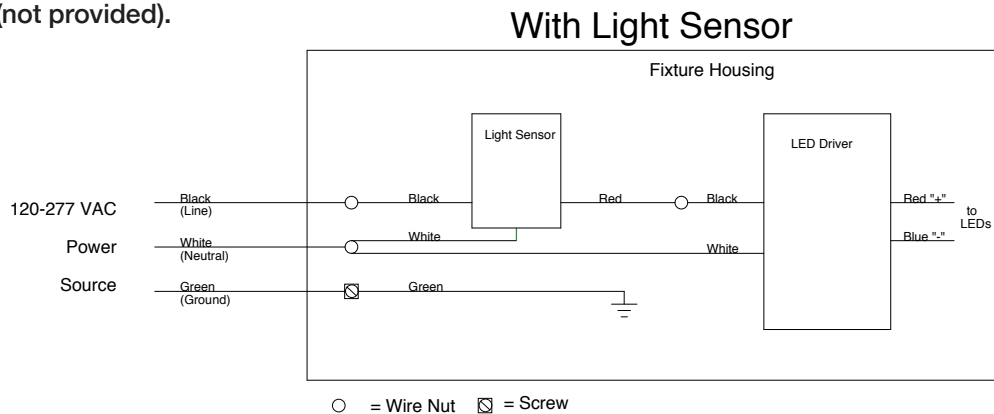

3401 Avenue D, Arlington, TX 76011 • 800-375-6355