

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides years of maintenance-free illumination for outdoor use in residential & commercial applications. Ideal for applications such as lighting walkways and stairways for safety and security.

CONSTRUCTION

Cast-aluminum housing with corrosion-resistant paint in either dark bronze or white finish.

ADA compliant.

OPTICS

4000K CCT LEDs.

Polycarbonate lens protects the LED from moisture, dirt and other contaminants.

LUMEN MAINTENANCE: The LED will deliver 70% of its initial lumens at 50,000 hour average LED life. See Lighting Facts label on page 2 for performance details.

ELECTRICAL

MVOLT driver operates on any line voltage from 120-277V

Operating temperature -30°C to 40°C.

1KV surge protection standard.

INSTALLATION

Surface mounts to universal junction box (provided by others).

LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations.

Tested in accordance with IESNA LM-79 and LM-80 standards.

WARRANTY

Five-year limited warranty. Full warranty terms located at

www.AcuityBrands.com/CustomerResources/Terms_and_Conditions.aspx.

Note: Specifications are subject to change without notice.

Actual performance may differ as a result of end-user environment and application.

Outdoor General Purpose


OLLWD & OLLWU

LED WALL CYLINDER LIGHT



Specifications

All dimensions are inches (centimeters)

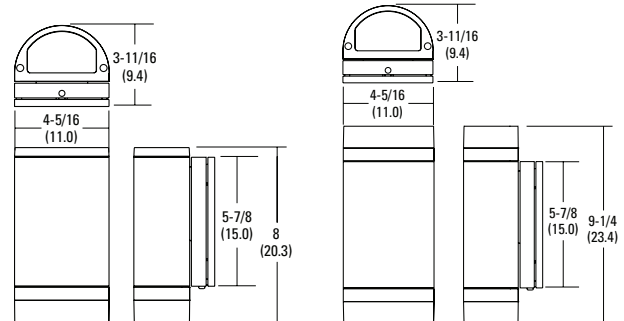

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: OLLWD




Series	Color temperature (CCT)	Voltage	Finish
OLLWD Downlight	(blank) 4000K	(blank) MVOLT (120V-277V)	DDB Dark bronze
OLLWU Up & downlight			WH White

OLLWD & OLLWU LED Wall Cylinder Light




PHOTOMETRICS

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's Outdoor LED homepage
 Tested in accordance with IESNA LM-79 and LM-80 standards.

OLLWD

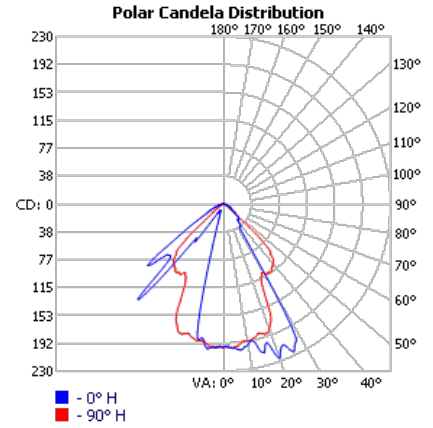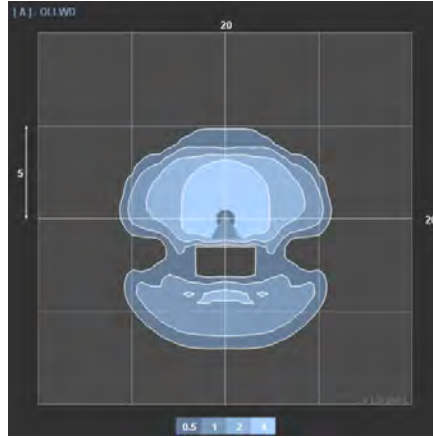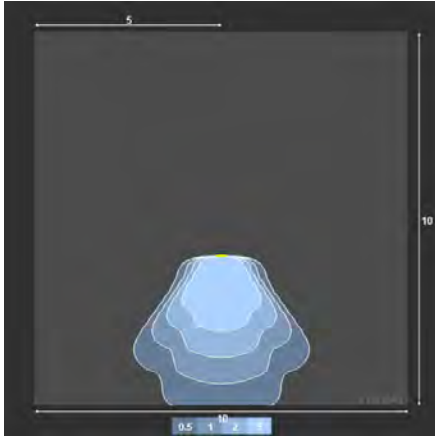

OLLWU

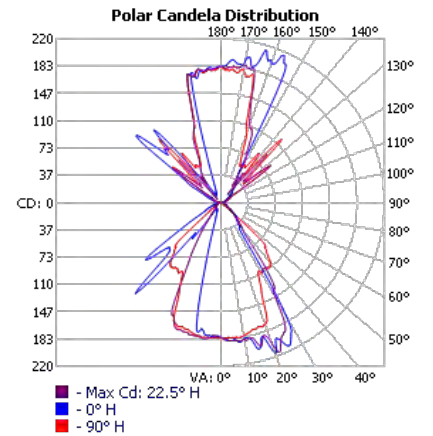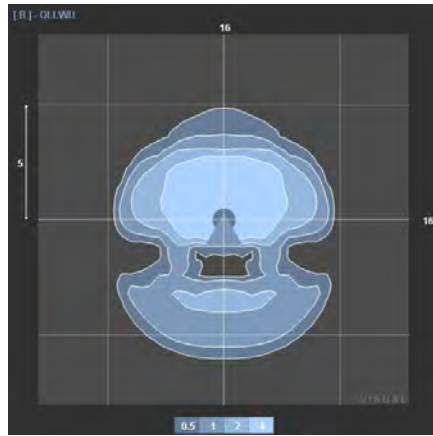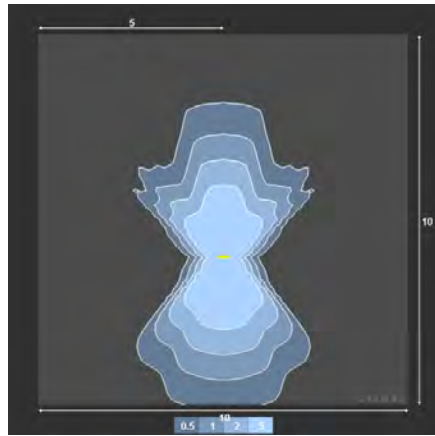

OLLWD

LED lighting facts[®] Acuity Brands Lighting
 A Program of the U.S. DOE

Light Output (Lumens)	270
Watts	9
Lumens per Watt (Efficacy)	30

Color Accuracy Color Rendering Index (CRI)	75
---	----

Light Color
Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2009: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-4KRE7Z (6/28/2012)
 Model Number: OLLWD
 Type: Outdoor wall-mounted porch lights

OLLWU

LED lighting facts[®] Acuity Brands Lighting
 A Program of the U.S. DOE

Light Output (Lumens)	500
Watts	14
Lumens per Watt (Efficacy)	34

Color Accuracy Color Rendering Index (CRI)	74
---	----

Light Color
Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2009: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-LSHACV (6/25/2012)
 Model Number: OLLWU
 Type: Outdoor wall-mounted porch lights