




D-Series Size 3 LED Flood Luminaire



d#series

Specifications

| | |
|------------------------|---|
| EPA: | 1.4 ft ² (0.13 m ²) |
| Depth: | 5" (12.7 cm) |
| Width: | 13" (33.0 cm) |
| Height: | 13-5/8" (34.6 cm) |
| Overall Height: | 17-1/2" (44.5 cm) |
| Weight: | 21 lbs (9.5 kg) |

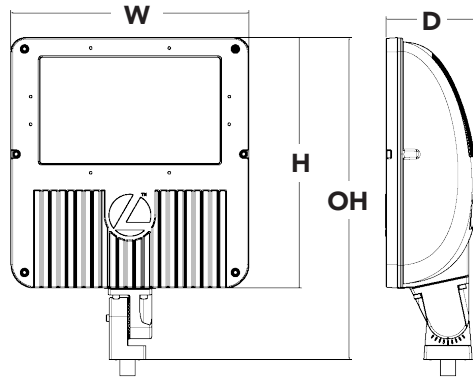

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series Size 3 Flood features precision optics to beautifully illuminate a variety of applications as its sleek, compact styling blends seamlessly with its environment.

The D-Series Flood reflector systems and cutting-edge chip-on-board LED technology produce low field-to-beam ratios for minimal spill light and incredible photometric performance. It's the ideal long-life replacement for 250 - 400W metal halide floods, with typical energy savings of 67% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSXF3 LED 8 A530/40K FL MVOLT THK DDBXD

| DSXF3 LED | Series | Light Engines | Performance Package | Distribution | Voltage | Mounting | Options | Finish (required) |
|-----------|--------|-----------------|---|--|--|---|---|---|
| DSXF3 LED | 6 | Six COB engines | 530 mA options: A530/30K 3000 K A530/40K 4000 K A530/50K 5000 K | NSP Narrow spot MSP Medium spot MFL Medium flood FL Flood WFL Wide flood WFR Wide flood, rectangular HMF Horizontal medium flood | MVOLT ¹ 120 ¹ 208 ¹ 240 ¹ 277 ¹ 347 480 | Shipped included THK Knuckle with 3/4" NPT threaded pipe YKC62 Yoke with 16-3 SO cord IS Integral slipfitter (fits 2-3/8" O.D. tenon) | Shipped installed PER NEMA twist-lock receptacle only (no controls) DMG 0-10V dimming driver (no controls) DCR Dimmable and controllable via ROAM [®] (no controls) ³ SF Single fuse (120, 277, 347V) ⁴ DF Double fuse (208, 240, 480V) ⁴ WTB Utility terminal block | DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White |
| | | | | | | | | |

Accessories

Ordered and shipped separately.

| | |
|------------------|---|
| FTS CG6 DDBXD U | Slipfitter for 2-3/8" to 2-7/8" OD tenons; mates with yoke mount (specify finish) |
| FRWB DDBXD U | Radius wall bracket, 2-3/8" OD tenon (specify finish) |
| FSPB DDBXD U | Steel square pole bracket, 2-3/8" OD tenon (specify finish) |
| DSXF3UBV DDBXD U | Upper/bottom visor accessory (specify finish) |
| DSXF3FV DDBXD U | Full visor accessory (specify finish) |
| DSXF3VG U | Vandal guard accessory |
| DSXF3WG U | Wire guard accessory |

For more mounting options, visit our [Floodlighting Accessories](#) pages.
For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES

- MVOLT driver operates on any line voltage from 120-277V. Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options).
- Also available as separate accessories; see Accessories information at left.
- Specifies a ROAM[®] enabled luminaire with 0-10V dimming capability; PER option required. Not available with 347 or 480V. Additional hardware and services required for ROAM[®] deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net.
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Light Engines | Drive Current (mA) | Performance Package | System Watts | Dist. Type | Field Angle | | Beam Angle | | 30K (3000 K, 70 CRI) | | | 40K (4000 K, 70 CRI) | | | 50K (5000 K, 70 CRI) | | | |
|---------------|--------------------|---------------------|--------------|------------|-------------|-----|------------|----|----------------------|--------|-------|----------------------|--------|-------|----------------------|--------|-------|-----|
| | | | | | °H | °V | °H | °V | Max Cd | Lumens | LPW | Max Cd | Lumens | LPW | Max Cd | Lumens | LPW | |
| 6 | 530 | A530/-K | 112W | NSP | 48 | 49 | 19 | 19 | 37,879 | 7554 | 67 | 39,299 | 9076 | 81 | 39,177 | 9119 | 81 | |
| | | | | | MSP | 50 | 48 | 24 | 23 | 32,755 | 7443 | 66 | 36,284 | 8943 | 80 | 36,171 | 8986 | 80 |
| | | | | | MFL | 60 | 60 | 47 | 46 | 12,061 | 7057 | 63 | 15,104 | 8479 | 76 | 15,057 | 8519 | 76 |
| | | | | | FL | 85 | 84 | 63 | 62 | 9898 | 9399 | 84 | 9985 | 11292 | 101 | 9954 | 11346 | 101 |
| | | | | | WFL | 106 | 106 | 71 | 72 | 6979 | 9327 | 83 | 7488 | 11927 | 106 | 7465 | 11260 | 101 |
| | | | | | WFR | 107 | 88 | 85 | 64 | 6859 | 9461 | 84 | 7460 | 11368 | 101 | 7436 | 11422 | 102 |
| | | | | | HMF | 100 | 62 | 80 | 13 | 7751 | 4138 | 37 | 6779 | 4972 | 44 | 6758 | 4996 | 45 |
| 8 | 530 | A530/-K | 148W | NSP | 48 | 49 | 19 | 19 | 52,471 | 10464 | 71 | 51,658 | 12572 | 85 | 51,496 | 12632 | 85 | |
| | | | | | MSP | 50 | 48 | 24 | 23 | 52,368 | 11900 | 80 | 47,694 | 14286 | 97 | 47,546 | 14354 | 97 |
| | | | | | MFL | 60 | 60 | 47 | 46 | 16,707 | 9775 | 66 | 19,854 | 11745 | 79 | 19,792 | 11801 | 80 |
| | | | | | FL | 85 | 84 | 63 | 62 | 13,711 | 13019 | 88 | 13,125 | 15642 | 106 | 13,084 | 15717 | 106 |
| | | | | | WFL | 106 | 106 | 71 | 72 | 9650 | 12897 | 87 | 9843 | 15482 | 105 | 9812 | 15556 | 105 |
| | | | | | WFR | 107 | 88 | 85 | 64 | 9501 | 13106 | 89 | 9805 | 15747 | 106 | 9775 | 15821 | 107 |
| | | | | | HMF | 100 | 62 | 80 | 13 | 10,736 | 5732 | 39 | 8911 | 6887 | 47 | 8883 | 6920 | 47 |

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient | | Lumen Multiplier |
|---------|-------|------------------|
| 0°C | 32°F | 1.05 |
| 10°C | 50°F | 1.03 |
| 20°C | 68°F | 1.01 |
| 25°C | 77°F | 1.00 |
| 30°C | 86°F | 0.99 |
| 40°C | 104°F | 0.97 |

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXF LED 8 A530 platform based on 8400 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours. For other lumen maintenance values, contact factory.


| Operating Hours | 0 | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.94 | 0.90 | 0.80 |

Electrical Load

| Light Engines | Drive Current (mA) | System Watts | Current (A) | | | | | |
|---------------|--------------------|--------------|-------------|------|------|------|------|------|
| | | | 120 | 208 | 240 | 277 | 347 | 480 |
| 6 | 530 | 112W | 0.92 | 0.53 | 0.47 | 0.47 | 0.32 | 0.23 |
| 8 | 530 | 148W | 1.20 | 0.69 | 0.60 | 0.53 | 0.41 | 0.30 |


Photometric Diagrams

Isocandela plots for the DSXF3 LED 8 A530/40K.

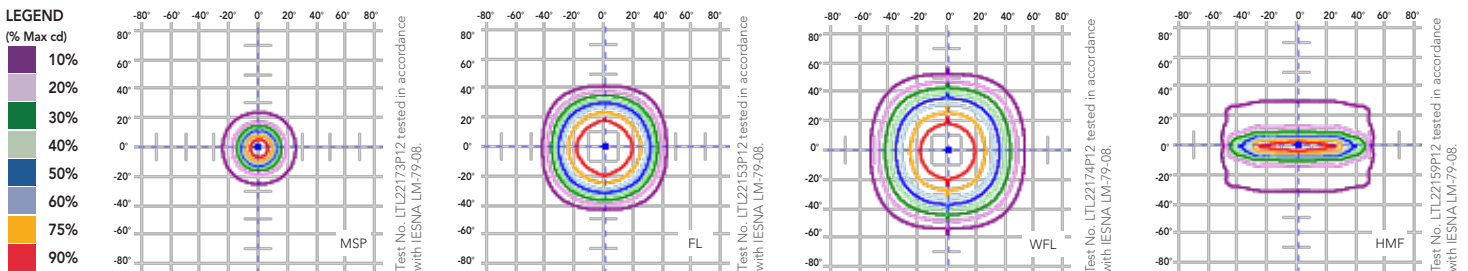

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Flood Size 3 homepage](#).

Mounting, Options and Accessories

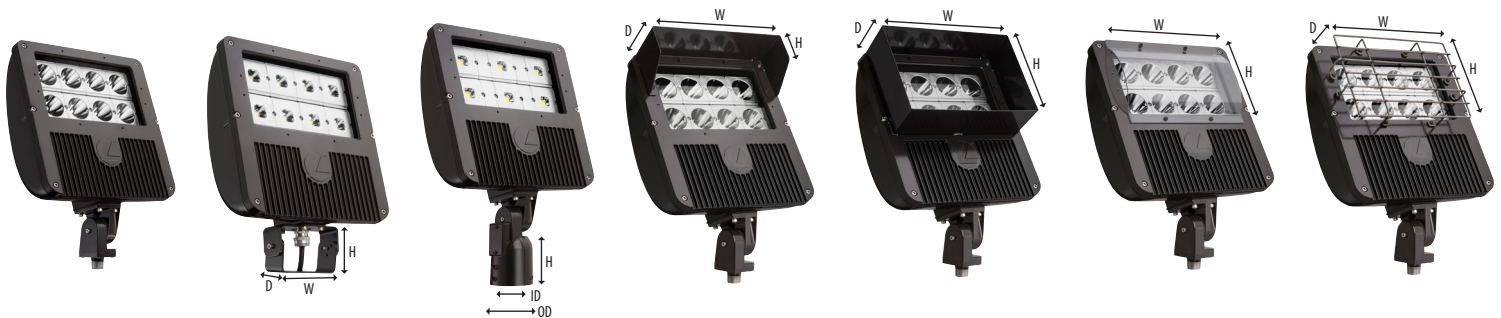

THK - Knuckle with 3/4" NPT threaded pipe

YKC62 - Yoke with S0 cord
 W= 5" (12.7 cm)
 H= 3-1/2" (8.8 cm)
 D= 2" (5.0 cm)

IS - Integral slipfitter
 H= 4-1/2" (11.4 cm)
 ID= 2-3/8" (6.0 cm)
 OD= 3-1/2" (8.8 cm)

UBV - Upper/bottom visor
 W= 12" (30.4 cm)
 H= 7-1/5" (19.0 cm)
 D= 3" (7.6 cm)

FV - Full visor
 W= 12" (30.4 cm)
 H= 7-1/5" (19.0 cm)
 D= 3" (7.6 cm)

VG - Vandal guard
 W= 10-1/2" (26.6 cm)
 H= 7-1/2" (19.0 cm)

WG - Wire guard
 W= 10-1/2" (26.6 cm)
 H= 7-1/2" (19.0 cm)
 D= 1-1/5" (3.8 cm)

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 3 Flood reflects the embedded high performance LED technology. It is ideal for wallwash, security and general area lighting in many commercial and institutional applications.

CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.4 ft²) for optimized wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

OPTICS

A variety of precision-molded vacuum-metallized specular reflectors are engineered for superior field-to-beam ratios, uniformity and spacing. Light engines are available in 3000 K (70 CRI min.), 4000 K (70 CRI min.) or 5000 K (70 CRI min.) configurations. Optional visors offer additional versatility.

ELECTRICAL

Light engines consist of chip-on-board (COB) LEDs directly coupled to the housing to maximize heat dissipation and promote long life (100,000 hrs, L80). Class 1 electronic driver has a power

factor >90%, THD <20%, and has an expected life of 100,000 hours with <1% failure rate. (Eight-engine unit uses two drivers.) Surge protection meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Integral adjustable knuckle with 3/4-14 NPT threaded pipe, or yoke mounting, facilitates quick and easy installation to a variety of mounting accessories. This secure connection enables the D-Series Size 3 to withstand up to a 1.5 G vibration load rating per ANSI C136.31.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five year limited warranty. Full warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.