

# WML20 / WML30(R)

## Wallpack light series

This series has a thin, smart and stylish shape with excellent cooling and high lumen efficacy of 100 to 95 lm/w. With various mounting options, this series is a great choice for anyone needing large amounts of light at a energy saving cost.


### Features

- Corrosion-Resistant Coating Finish
- Imported high-dense aluminum alloy housing
- High transparency and weather resistant lens
- Color options: Gray, **Bronze**

### Applications

- Building exteriors
- Walls and corridors

## Installation Diagram

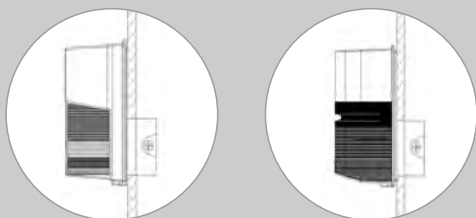

## Specifications

	Model:	WML20S(R) (Semi Circle)(Rectangle)	WML30S(R) (Semi Circle)(Rectangle)
General	Lumen Efficacy:	100 lm/w & 95 lm/w	100 lm/w & 95 lm/w
	Lumen Output:	2,000 lm or 1,900 lm	3,000 lm or 2,850 lm
Electrical	Input Power:	20W	30W
	Input Voltage:	100-277V	100-277V
	Power Factor:	>90%	>90%
Color	Color Temperature (CCT):	3000k-5700k	3000k-5700k
	Color Rendering Index (CRI):	>80	>80
Operational	Dimmable:	No	No
	Dimensions:	11 in x 6.8 in x 5.1 in	11 in x 6.8 in x 5.1 in
	Rating:	IP65	IP65
	Mounting Option:	WM (Wall mount)	WM (Wall mount)
	Warranty:	5 Year	5 Year