



GREENCREATIVE

Bringing You the Latest in LED Technology

INNOFIT
SERIES



CDL INNOFIT SERIES

COMMERCIAL DOWNLIGHT PRODUCT FEATURES



Adjustable Lumen Output

This commercial downlight features adjustable lumen output for three distinct lumen levels equivalent to various CFL lamp combinations. Simply adjust the lamp power to the desired lumen output by sliding the selector switch on top of the fixture.



Easy-Fit Installation

The adjustable housing clips allow for installation in a large range of commercial and architectural housings. These spring-action clips push up easily and fit securely for both retrofit and new construction installations.

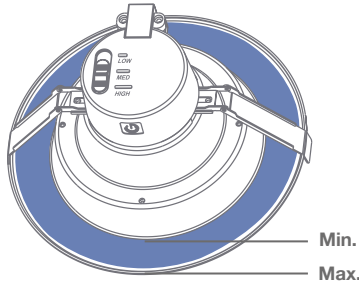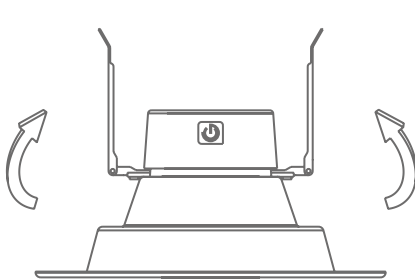


Housing Compatibility


| Model | Aperture Min. | Aperture Max. |
|-------|---------------|---------------|
| 9.5" | 8.6" (220mm) | 10.4" (265mm) |
| 8" | 7.6" (195mm) | 9.4" (240mm) |
| 6" | 6.0" (153mm) | 7.4" (190mm) |
| 4" | 3.9" (100mm) | 5.1" (130mm) |

Simple Retrofit or Economical New Construction Installation


Retrofit Installation




Attach safety clip




Bypass ballast & wire to j-box



Adjust lumens to desired output




Push clips up & install into fixture




Ensure fixture is flush. Installation is complete


New Construction Installation




Attach safety clip




Wire to j-box



Adjust lumens to desired output




Push clips up & install into opening



Ensure fixture is flush. Installation is complete

CDL INNOFIT SERIES

9.5" CDL 45W




-4.84" (123mm)-

- 120-277V Universal voltage
- 23.5W / 32W / 45W
- 2000lm / 2500lm / 3200lm
- 2700K / 3000K / 3500K / 4000K CCT

| Fluorescent Equivalence | | |
|-------------------------|--------|---------------|
| Power | Lumens | Equivalent |
| LOW-23.5W | 2000 | 1X42W / 2X26W |
| MED-32W | 2500 | 1X57W / 2X32W |
| HIGH-45W | 3200 | 2X42W |

8" CDL 27W




-4.33" (110mm)-

- 120-277V Universal voltage
- 12W / 19W / 27W
- 1000lm / 1500lm / 2000lm
- 2700K / 3000K / 3500K / 4000K CCT

| Fluorescent Equivalence | | |
|-------------------------|--------|---------------|
| Power | Lumens | Equivalent |
| LOW-12W | 1000 | 1X26W / 2X13W |
| MED-19W | 1500 | 1X32W / 2X18W |
| HIGH-27W | 2000 | 1X42W / 2X26W |

6" CDL 21W




-4.02" (102mm)-

- 120-277V Universal voltage
- 8.5W / 13.5W / 21W
- 700lm / 1000lm / 1500lm
- 2700K / 3000K / 3500K / 4000K CCT

| Fluorescent Equivalence | | |
|-------------------------|--------|---------------|
| Power | Lumens | Equivalent |
| LOW-8.5W | 700 | 1X18W |
| MED-13.5W | 1000 | 1X26W / 2X13W |
| HIGH-21W | 1500 | 1X32W / 2X18W |

4" CDL 14W



-3.46" (88mm)-

- 120-277V Universal voltage
- 6W / 9W / 14W
- 500lm / 700lm / 1000lm
- 2700K / 3000K / 3500K / 4000K CCT

| Fluorescent Equivalence | | |
|-------------------------|--------|---------------|
| Power | Lumens | Equivalent |
| LOW-6W | 500 | 1X13W |
| MED-9W | 700 | 1X18W |
| HIGH-14W | 1000 | 1X26W / 2X13W |








LM 79

LM 80

TM 21



SPECIFICATIONS*

| | Model | Product | CCT | Power (W) | Lumens (lm) | LPW | Beam Angle | CRI (typ.) | Dim | Life (hrs) | Voltage |  |
|--|--------------------|---------|-------|-------------|----------------|----------|------------|------------|-----|------------|----------|---|
|  CDL 9.5\" 45W | 45CDLA9.5/827/277V | 57878 | 2700K | 23.5/32/45 | 1860/2325/2975 | 79/73/66 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
| | 45CDLA9.5/830/277V | 57879 | 3000K | 23.5/32/45 | 2000/2500/3200 | 85/78/71 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
| | 45CDLA9.5/835/277V | 57880 | 3500K | 23.5/32/45 | 2000/2500/3200 | 85/78/71 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
| | 45CDLA9.5/840/277V | 57881 | 4000K | 23.5/32/45 | 2000/2500/3200 | 85/78/71 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
|  CDL 8\" 27W | 27CDLA8/827/277V | 57873 | 2700K | 12/19/27 | 930/1400/1860 | 78/74/69 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
| | 27CDLA8/830/277V | 57874 | 3000K | 12/19/27 | 1000/1500/2000 | 83/79/74 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
| | 27CDLA8/835/277V | 57875 | 3500K | 12/19/27 | 1000/1500/2000 | 83/79/74 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
| | 27CDLA8/840/277V | 57876 | 4000K | 12/19/27 | 1000/1500/2000 | 83/79/74 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
|  CDL 6\" 21W | 21CDLA6/827/277V | 57868 | 2700K | 8.5/13.5/21 | 650/930/1400 | 76/69/67 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
| | 21CDLA6/830/277V | 57869 | 3000K | 8.5/13.5/21 | 700/1000/1500 | 82/74/71 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
| | 21CDLA6/835/277V | 57870 | 3500K | 8.5/13.5/21 | 700/1000/1500 | 82/74/71 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
| | 21CDLA6/840/277V | 57871 | 4000K | 8.5/13.5/21 | 700/1000/1500 | 82/74/71 | 110° | 80 | No | 40,000 | 120-277V | ✓ |
|  CDL 4\" 14W | 14CDLA4/827/277V | 57863 | 2700K | 6/9/14 | 465/650/930 | 78/72/66 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
| | 14CDLA4/830/277V | 57864 | 3000K | 6/9/14 | 500/700/1000 | 83/78/71 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
| | 14CDLA4/835/277V | 57865 | 3500K | 6/9/14 | 500/700/1000 | 83/78/71 | 110° | 80 | No | 40,000 | 120-277V | Mar. |
| | 14CDLA4/840/277V | 57866 | 4000K | 6/9/14 | 500/700/1000 | 83/78/71 | 110° | 80 | No | 40,000 | 120-277V | Mar. |

* Specification data is preliminary and may be subject to change
** Suitable for damp locations