

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The VT Series Volumetric LED Troffer (VTL) combines the aesthetics and high performance with intelligent LED engines for applications such as offices, schools, retail locations and hospitals. High-efficacy light engines deliver long life and excellent color, ensuring a superior quality lighting installation that is highly efficient and sustainable. Multiple lumen packages and driver options provide solutions for all your lighting applications. Featured nLight control system provides design flexibility and ease of installation and optimum energy savings.

**CONSTRUCTION** — Rugged, one-piece cold-rolled steel coated polyester, painted after fabrication with embossed facets. Impact-modified, single clear acrylic diffuser provides excellent shielding and wide distribution. End plates include integral T-bar clips. Fixture may be mounted and wired in continuous rows. Total fixture height is only 4-3/8".

**OPTICS** — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions, vertical and horizontal work surfaces — rendering the interior space, objects and occupants in a more balanced, complementary luminous environment. Linear faceted reflector cavity softens and distributes light into the space while minimizing luminous contrast between the fixture and ceiling. Sloped end plates provide a smooth, luminous transition between fixture and ceiling while enhancing the perception of fixture depth. High-performance diffuser provides LED concealment, even illumination across the diffuser and improved lumen-per-watt performance.

Now available with two different aesthetics including the standard Acrylic Linear Prismatic Diffuser (ADP) and the Acrylic Linear Prismatic Diffuser with Diffuser Trim Rings (ADPT).

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices and the VTLED luminaires using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission.

**Lumen Management:** Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

**SENSOR** — **Integrated sensor (individual control):** Sensor Switch MSD7ADCX ((Passive infrared (PIR)) or MSDPDT7ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 2 for more details on the integrated sensor.



VT Series Volumetric LED Troffer

# 2VTL

2' x 2'  
LED



**Integrated Sensor (nLight Wired Networking):** This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 2 for the nLight sensor options.

**INSTALLATION** — Unique grid interfacing arrangement provides mounting into standard 1" and 9/16" tee bar or screw slot grids. 9/16" allows fixture trim to hang level with architectural ceiling tiles. Drywall ceiling adaptors available. Suitable for damp location.

**LISTINGS** — CSA Certified to meet U.S. and Canadian standards. IC rated. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List to confirm which versions are qualified.

**WARRANTY** — 5-year limited warranty.

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.

### ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** 2VTL2 40L ADPT EZ1 LP840 MSD7ADCX

Series	Air function	Lumens	Diffuser	Voltage	Driver	Color temperature
2VTL2 2X2 VTL	(blank) Static H Heat removal	20L 2000 <sup>1</sup> 33L 3300 <sup>1</sup> 40L 4000 <sup>1</sup>	ADP Acrylic linear prismatic ADPT Acrylic linear prismatic with diffuser trim rings	(blank) MVOLT 347 347 <sup>2</sup>	EZ1 eldoLED dims to 1% (0-10 volt dimming) EZB eldoLED dims to dark (0-10 volt dimming) EDB eldoLED DALI <sup>3</sup> EXB eldoLED DMX/RDM <sup>3</sup> SLD Step-level dimming <sup>3</sup> EXA1 Dims to 1%, XPoint wireless enabled <sup>4</sup> EXAB Dims to dark, XPoint wireless enabled <sup>4</sup>	LP830 82CRI, 3000 K LP835 82CRI, 3500 K LP840 82CRI, 4000 K LP850 82CRI, 5000 K

Controls	Occupancy Control <sup>6</sup>	Options
(blank) No nLight <sup>®</sup> N80 nLight <sup>®</sup> with 80% lumen management N80EMG nLight <sup>®</sup> with 80% lumen management For use with generator supply EM power <sup>5</sup> N100 nLight <sup>®</sup> without lumen management N100EMG nLight <sup>®</sup> without lumen management For use with generator supply EM power <sup>5</sup>	(blank) No sensor control <b>nLight Wired Networking</b> NES7 nLight™ nES 7 PIR integral occupancy sensor <sup>7</sup> NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control <sup>7</sup> NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell <sup>7</sup> NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell <sup>7</sup>	<b>Xpoint Wireless Networking</b> XADS7 Xpoint™ micro 360° PIR occupancy sensor and automatic dimming photocell <sup>4,8,9</sup> <b>Individual Control</b> MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell <sup>8,10</sup> MSDPDT7ADCX PDT integral occupancy sensor with automatic dimming control photocell <sup>8,10</sup>
		EL7L 700 lumen battery pack EL14L 1400 lumen battery pack CP Chicago plenum

Accessories: Order as separate catalog number.	
2VT2 F916	Trim to adjust fixture mounting flush with 9/16" T-bar; for 2x2 fixture
DGA24 FS/VT	Drywall ceiling adapter with trim kit

#### Notes

- 1 Approximate lumen output.
- 2 Consult factory for availability. Not available with SLD,EL7L or EL14 battery packs.
- 3 Not available with N80, N80EMG, N100 or N100EMG.
- 4 Gateway not included. Requires on-site commissioning. Visit [www.lightingcontrols.com/XPointWireless](http://www.lightingcontrols.com/XPointWireless) for more information.
- 5 nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
- 6 Must specify ADPT diffuser. See sensor section on page 2.
- 7 Requires N80, N80EMG, N100, or N100EMG.
- 8 Not available with N80, N80EMG, N100, or N100EMG.
- 9 Only available with EXA1 or EXAB driver options.
- 10 Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.


# 2VTL Volumetric Recessed Lighting 2'x2'

Performance Data			
Lumen Package	Lumens	Input Watts <sup>3</sup>	LPW
20L LP830	2044.0	20.39	100.2
20L LP835	2196.0	20.39	107.7
20L LP840	2241.0	20.51	109.3
20L LP850	2401.0	20.51	117.1
33L LP830	3357.0	34.31	97.8
33L LP835	3564.0	34.5	103.3
33L LP840	3670.0	34.59	106.1
33L LP850	3911.0	34.71	112.7
40L LP830	3919.0	41.27	95.0
40L LP835	4179.0	41.42	100.9
40L LP840	4271.0	41.66	102.5
40L LP850	4543.0	41.81	108.7

Note: Based on ADP diffuser

Sensor Options					
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking	Xpoint Wireless Networking
		PIR	PDT		
MSD7ADCX	X	X			
MSDPDT7ADCX	X		X		
NES7		X		X	
NES7ADCX	X	X		X	
NESPDT7			X	X	
NESPDT7ADCX	X		X	X	
XADS7	X	X			X

## Basic nLight Zone

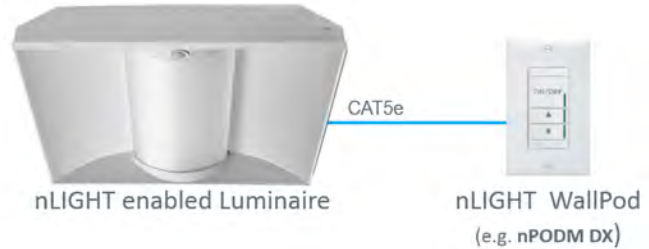

## Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.


The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

## nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the NES7ADCX includes an integrated photocell, which enables daylight harvesting controls.


For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the NESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

## Sequence of Operation

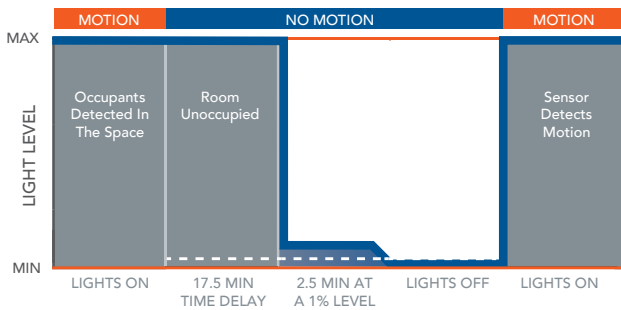

\*The presetting on the automatic dimming photocell is 5fc.

## Sequence of Operation

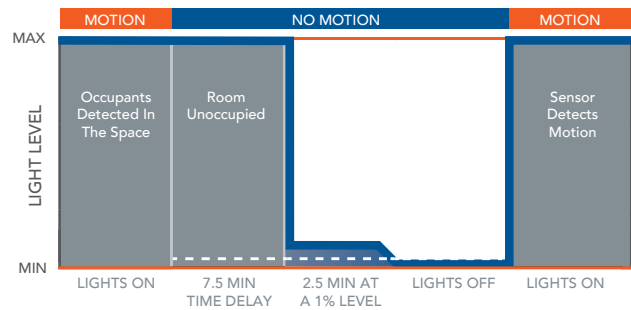


\*The presetting on the automatic dimming photocell is 5fc.

## Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor


## 9 FT Mounting

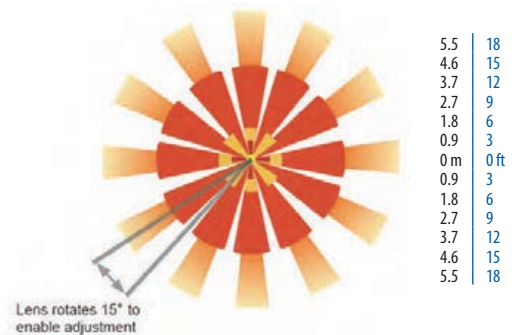

# 2VTL Volumetric Recessed Lighting 2'x2'

## PHOTOMETRICS

2VTL2 20L ADP LP835, 2196 delivered lumens, test no. LTL24790P, tested in accordance to IESNA LM-79

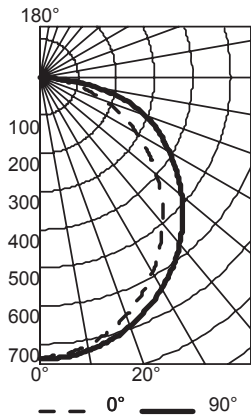

### CP Summary

	0°	90
0°	737	737
5°	729	737
15°	692	714
25°	630	669
35°	547	607
45°	451	529
55°	347	440
65°	236	344
75°	123	229
85°	28	62
90	2	2


### Coefficients of Utilization

pw	20%								
	80%			70%			50%		
pc	70%	50%	30%	50%	30%	10%	50%	30%	10%
0	119	119	119	116	116	116	111	111	111
1	108	103	98	101	96	93	96	93	90
2	98	89	82	87	81	75	84	78	73
3	89	78	69	76	68	62	73	66	61
4	81	69	60	67	59	52	65	57	52
5	75	61	52	60	51	45	58	50	44
6	69	55	46	54	46	39	52	45	39
7	64	50	41	49	41	35	48	40	34
8	59	46	37	45	37	31	43	36	31
9	55	42	33	41	33	28	40	33	28
10	52	39	31	38	30	25	37	30	25

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0° - 30°	569	25.9	25.9
0° - 40°	931	42.4	42.4
0° - 60°	1663	75.7	75.7
0° - 90°	2197	100.0	100.0
90° - 180°	0	0.0	0.0
0° - 180°	2197	100.0	100.0

2VTL2 33L ADP L835, 3564 delivered lumens, test no. LTL24790P4, tested in accordance to IESNA LM-79

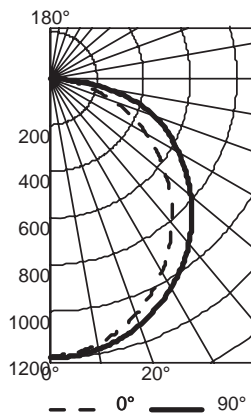

### CP Summary

	0°	90
0°	1196	1196
5°	1182	1196
15°	1123	1158
25°	1022	1085
35°	888	985
45°	732	858
55°	563	713
65°	384	558
75°	199	371
85°	45	101
90	3	3


### Coefficients of Utilization

pw	20%								
	80%			70%			50%		
pc	70%	50%	30%	50%	30%	10%	50%	30%	10%
0	119	119	119	116	116	116	111	111	111
1	108	103	98	101	96	93	96	93	90
2	98	89	82	87	81	75	84	78	73
3	89	78	69	76	68	62	73	66	61
4	81	69	60	67	59	52	65	57	52
5	75	61	52	60	51	45	58	50	44
6	69	55	46	54	46	39	52	45	39
7	64	50	41	49	41	35	48	40	34
8	59	46	37	45	37	31	43	36	31
9	55	42	33	41	33	28	40	33	28
10	52	39	31	38	30	25	37	30	25

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0° - 30°	923	25.9	25.9
0° - 40°	1511	42.4	42.4
0° - 60°	2698	75.7	75.7
0° - 90°	3565	100.0	100.0
90° - 180°	0	0.0	0.0
0° - 180°	3565	100.0	100.0

## Mounting Data

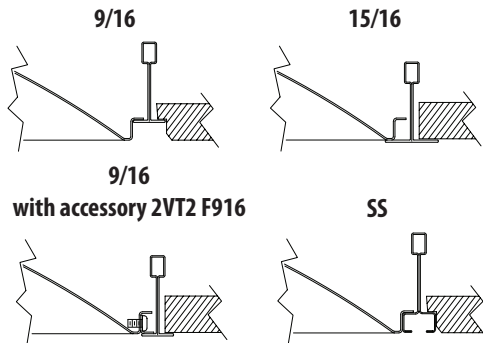

### nLight® Control Accessories:

Order as separate catalog number. Visit [www.sensorswitch.com/nLight](http://www.sensorswitch.com/nLight) for complete listing of nLight controls.


WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODM [color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPODM DX [color]	Large motion 360°, ceiling (PIR / dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX	Wall switch with raise/lower	nWSXPDTLVDX
Photocell controls	Model number	Cat-5 cable bundles (plenum rated)	Model number
On/Off & Dimming	nCM ADCX	10', 15 pieces per bundle	CAT5 10FT
		30', 15 pieces per bundle	CAT5 30FT

## Dimensions

All dimensions are inches (centimeters) unless otherwise specified.

### Specifications

Length: 24 (61.0)  
Width: 24 (61.0)  
Depth: 4-3/8 (11.1)

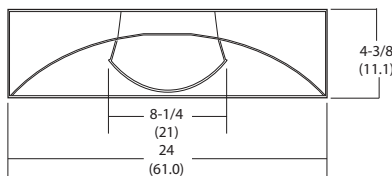

## Constant Lumen Management

Enabled by the embedded nLight control, the VTL actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

