



LED LAMPS

ProLED **ECO Select PAR Series**



IP65 Rated



5-Year Warranty



Dimmable

The energy efficiency of LED with the look and feel of traditional halogen lamps



ECO

SELECT

ProLED



- 25,000 Hour Life
- 82 CRI
- Dimmable
- Wet Location Rated
- **ENERGY STAR® Certified**
- 5-Year Warranty

A limited budget doesn't mean sacrificing quality features; ECO Select delivers reliable performance at a budget-friendly price

Applications:

- Accent
- Display
- Education
- Healthcare
- Hospitality
- Office
- Retail

Markets:


- Commercial
- Residential
- Outdoor




ProLED® ECO Select PAR Series

Specifications

- UL Listed for wet locations – allows for indoor/outdoor application flexibility
- Acceptable for use in ICAT rated luminaires
- Dimmable to 10%
- Prismatic glass lens and silver housing offers traditional halogen PAR look and feel
- Superior efficacy – up to 80 lumens per watt

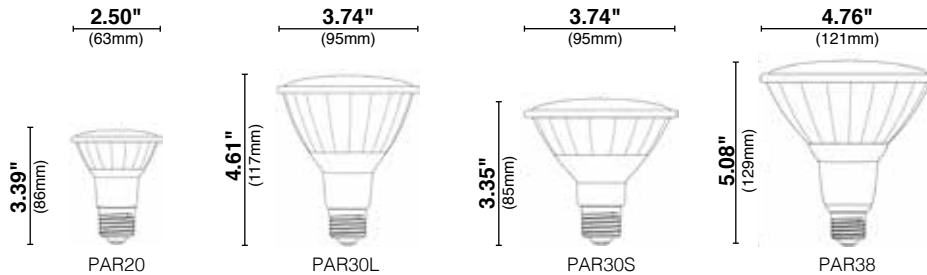

Savings Comparison

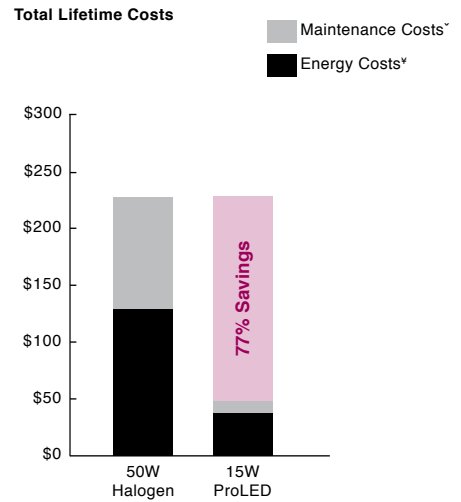

* Maintenance costs based on 15 minutes at \$40 per/hr
 ¥ Energy costs based on \$0.11 kWh

Ordering Information



| | Watt | Base | Product # | Product Code | Description | Volts | Color Temp. | CRI | Lumens | CBCP | Useful Life* | Beam Spread | Pkg. Qty. | MOL | Equivalent Wattage |
|----------------|------|--------|-----------|------------------------|--------------|-------|-------------|-----|--------|------|--------------|-------------|-----------|-------|--------------------|
| PAR20 | | | | | | | | | | | | | | | |
| ⊕ | 7 | Medium | 80963 | PAR20FL7/827/ECO/LED | Flood | 120 | 2700K | 82 | 500 | 600 | 25,000 | 40° | 1/6 | 3.39" | 50 |
| ⊕ | 7 | Medium | 80964 | PAR20FL7/830/ECO/LED | Flood | 120 | 3000K | 82 | 500 | 600 | 25,000 | 40° | 1/6 | 3.39" | 50 |
| PAR30 L | | | | | | | | | | | | | | | |
| ⊕ | 10 | Medium | 80958 | PAR30FL10L/827/ECO/LED | Flood | 120 | 2700K | 82 | 800 | 1120 | 25,000 | 40° | 1/6 | 4.61" | 50 |
| ⊕ | 10 | Medium | 80959 | PAR30FL10L/830/ECO/LED | Flood | 120 | 3000K | 82 | 800 | 1120 | 25,000 | 40° | 1/6 | 4.61" | 50 |
| ⊕ | 10 | Medium | 80960 | PAR30FL10L/840/ECO/LED | Flood | 120 | 4000K | 82 | 800 | 1120 | 25,000 | 40° | 1/6 | 4.61" | 50 |
| PAR30 S | | | | | | | | | | | | | | | |
| ⊕ | 10 | Medium | 80961 | PAR30FL10S/827/ECO/LED | Flood | 120 | 2700K | 82 | 800 | 960 | 25,000 | 40° | 1/6 | 3.35" | 45 |
| ⊕ | 10 | Medium | 80962 | PAR30FL10S/830/ECO/LED | Flood | 120 | 3000K | 82 | 800 | 960 | 25,000 | 40° | 1/6 | 3.35" | 45 |
| PAR38 | | | | | | | | | | | | | | | |
| ⊕ | 15 | Medium | 80953 | PAR38FL15/827/ECO/LED | Flood | 120 | 2700K | 82 | 1200 | 1800 | 25,000 | 40° | 1/6 | 5.08" | 90 |
| ⊕ | 15 | Medium | 80954 | PAR38FL15/830/ECO/LED | Flood | 120 | 3000K | 82 | 1200 | 1800 | 25,000 | 40° | 1/6 | 5.08" | 90 |
| ⊕ | 15 | Medium | 80955 | PAR38FL15/840/ECO/LED | Flood | 120 | 4000K | 82 | 1200 | 1800 | 25,000 | 40° | 1/6 | 5.08" | 90 |
| ⊕ | 15 | Medium | 80956 | PAR38FL15/850/ECO/LED | Flood | 120 | 5000K | 82 | 1200 | 1800 | 25,000 | 40° | 1/6 | 5.08" | 90 |
| ⊕ | 15 | Medium | 80957 | PAR38NFL15/830/ECO/LED | Narrow Flood | 120 | 3000K | 82 | 1200 | 3600 | 25,000 | 25° | 1/6 | 5.08" | 90 |

NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® Certified.

Warranty - Commercial/Industrial: This product is warranted for 5 years from the date purchase, based on 10 hours of use per day.

Not for use in enclosed fixtures.

May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.