




## CANDLE AND CANDELABRA CFL

### Decorative Candle and Candelabra CFL


Nominal Wattage	Model #	Item Description & CCT	Initial Lumen	Average Rated Life (Hrs.)	Diameter (Inches/mm)	Length/ (Inches/mm)	Pack Inner/ Master	Item #
7	7WODCD/E12	7W Candle CFL Candelabra Base Soft White	340	10,000	1.8 / 45	4.7 / 119	12	139
7	7WODCD	7W Candle CFL Medium Base Soft White	340	10,000	1.8 / 45	4.8 / 122	12	140
13	● 13WODT2S/E12	13W T2 Spiral CFL Candelabra Base Soft White	825	10,000	1.8 / 46	4.2 / 106	25/50	165
13	● 13WODT2S/E12/41K	13W T2 Spiral CFL Candelabra Base Cool White	825	10,000	1.8 / 46	4.2 / 106	25/50	171
13	● 13WODT2S/E12/50K	13W T2 Spiral CFL Candelabra Base Natural DL	825	10,000	1.8 / 46	4.2 / 106	25/50	172

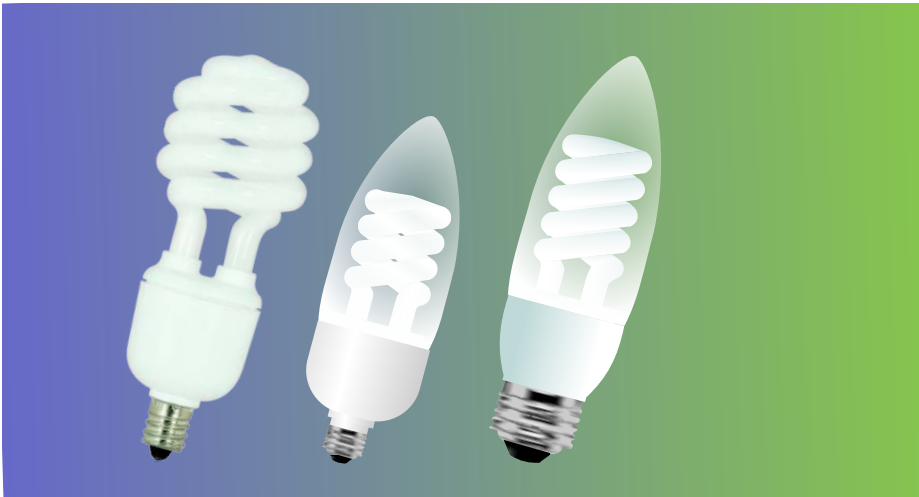

#### Applications




WALL SCONE



CHANDELIER



CEILING FAN



READING LAMP



OUTDOOR COVERED

#### Features

- ≠ 10,000 hour average rated life reduces relamping & related costs
- ≠ Rare earth tri-phosphor with 80 plus CRI for better performance
- ≠ High Luminous Efficacy
- ≠ 75% Lower Power Consumption over incandescent bulbs
- ≠ Available in various color temperature
- ≠ Compact in Size and fits most applications

#### Notes

- ≠ Not Dimmable
- ≠ Available in other color temperature also (upon request)
- ≠ Dimension with + 0.1 inch tolerance

