



GP19 (4Pack)

Benefits

- LED replicates traditional incandescent illumination
- Higher efficacy offers more light output while consuming less power.
- 40WE/2700K or 60WE/5000K options
- Non-Dimmable
- RoHS Compliant - Contains no Mercury or Lead

FEATURES

Equivalent Source Standard	40WE & 60WE Incandescent
Rated Life	20,000 hours
Housing	Plastic
Socket	E26
Voltage	120 VAC
Warranty	5 year limited
Packaging	4-Pack Box



A19

Part Number	Base Type	Wattage	Lumens	Voltage	Efficacy	CRI	Dimmable
LSB GP19 40WE W27 NDM 120 G2 4PK	E26	6	450	120V	75	80+	No
LSB GP19 60WE CW NDM 120 G2 4PK	E26	10	800	120V	80	80+	No

ORDERING INFORMATION

Family	Product	Watt Equivalent		Color (CCT)		Voltage		Family	Packaging
LSB Lighting Science Basics	GP19 GP19	40WE	40W Equivalent	W27	Soft White 2700K	120	120 Volt	G2	4PK
LSB Lighting Science Basics	GP19 GP19	60WE	60W Equivalent	CW	Cool White 5000K	120	120 Volt	G2	4PK

NORTH AMERICAN CERTIFICATIONS



ENVIRONMENT






FEATURES¹

Equivalent Source Standard	40W & 60W Incandescent
Rated Life	20,000 hours
Housing	Aluminum
Socket	E26
Beam Spread	Flood
Operating Temperature	-20°C to +40°C
E26 MOL	2.5 in, 63.5mm
Voltage	120VAC
Weight	0.3lbs., 136g
Power Factor	≥.7
Warranty	5 year limited

GP19

Benefits

- Higher efficacy offers more light output while consuming less power.
- Only 6W/10W
- Maintenance free operation, lasts up to 20x longer than Incandescent lighting.
- RoHS Compliant - Contains no Mercury or Lead.

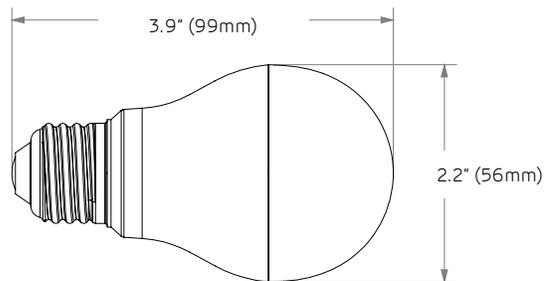

Specifications supplied are nominal. Please refer to the DOE's Lighting Facts Tolerance Guidelines.
¹ Values are nominal, advances from further innovation, specifications are subject to change.