

# Incandescent Rope Light

Safety instructions for 13MM-Kits (120V)



## HOW TO EXTEND ROPELIGHT


NOTE: Do not exceed 150' maximum run distance when linking extension segments together.

1. Turn the plastic end cap counter-clockwise to remove from the first rope light.
2. Remove power cord from the second piece of rope light.
3. Connect both ends of the ropes (the male and female halves plug into each other). Make sure all connectors are firmly tightened and secured. See Figure 2.
4. Repeat steps 1, 2 and 3 for any additional extensions.
5. Turn the plastic end cap clockwise until it is firmly tightened and secured on the last rope light.

## HOW TO INSTALL ROPE LIGHT


1. Attach mounting clips with nails or screws onto wooden surfaces. Be sure that the mounting surface is mechanically sound. See Figure 3.
2. Mounting clips should be evenly spaced and be a maximum of 12 inches apart.
3. Make sure that the distance between two separate/nearby lines of Rope Light are at least 1/2" apart.
4. Gently press Rope Light into clips so that it snaps into place.

Figure 2

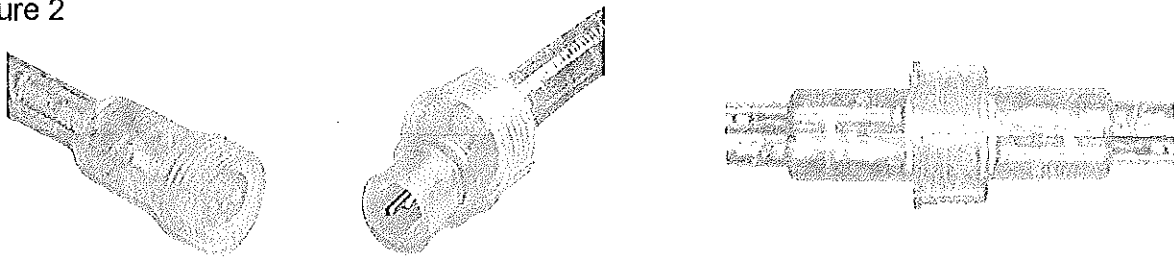

Interconnecting Sections: Connect male and female halves together and firmly tighten connectors to secure.

Figure 3



Attaching mounting clips

## PROP 65 WARNING

Handling the coated electrical wires of this product exposes you to lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm.

**WASH HANDS AFTER USE**