



TECHNICAL DATA SHEET

83233

LED CANOPY

PARKING GARAGE LUMINAIRES

FEATURES

- Ultra-thin design
- Replaces 400W MH

HOUSING

- Sealed die-casting profile for indoor applications
- Polycarbonate optical lens with heat resisting

MOUNTING

- Three 1/2" threaded conduit and one 3/4" conduit entry points

APPLICATION

Parking structures and storage areas

PRODUCT DETAILS

ELECTRICAL

Wattage	65W
Voltage	100-277V
Current	0.541A
Power Factor	0.9
Total Harmonic Distortion (THD)	13.8

LIGHTING PERFORMANCE

Lumens	6600
Lumens Per Watt (Lm/W)	101
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
Beam Angle	160°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-25°C ~ 40°C
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

CERTIFICATIONS



COMPONENTS

LED Light Source	Cree CXA2
Driver	52112 (75W Max.)

CONSTRUCTION


Housing	Aluminum / PC
Base / Power Supply	Hard Wired
Finish	Black

PACKAGING

Master Carton	6pc / 10811768025948
Individual Box	811768025941
Country of Origin	China
HS Tariff	9405.40.6000

DIMENSIONS

Dimensions (Inches)	9.6"(L) x 9.6"(W) x 2.9"(D)
---------------------	-----------------------------

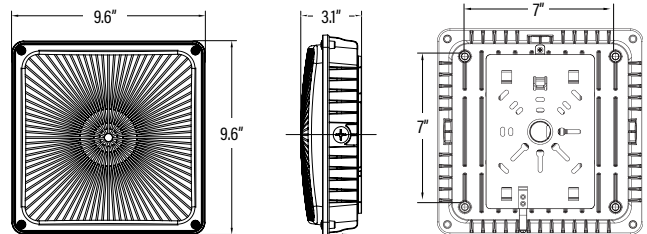

ORDERING

ITEM#	DESCRIPTION	CASE
83230	LED CANOPY 45W/50K/100-277V/BLACK /DIMMABLE	6
ACCESSORIES		
832338	REPLACEMENT LENS FOR CANOPIES	1

Published lumens on LED products are approximate and may vary slightly.