


LED Square Canopy

DIMENSIONS

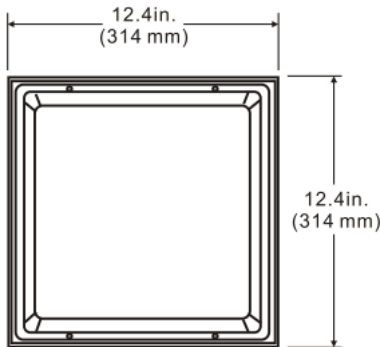

APPLICATION

The LSC family of LED canopy fixtures combine high-performance LEDs, highly-engineered optics to traditional designs to bring you the most advanced line of canopy fixtures on the market. The long LED life coupled with exceptional color rendering make this fixture attractive for new or retrofit projects. Multiple lumen packages mean there is an LSC that is just right for your lighting needs.

FEATURES

- Sturdy, weather-resistant bronze aluminum housing.
- Adjustable dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings. The photocell can be disabled with one turn on its cover.
- Direct replacement of fluorescent Long life, 60,000 hour LEDs at L80 reduce lift cycle maintenance costs
- Battery backup available for emergency egress applications

CONSTRUCTION

Rugged die cast aluminium housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineer internal heat dissipation fins provide superior thermal management for lens life and reliability.

MOUNTING

Luminaire mounting designed for standard J-Box. Features multiple conduit entries.

ELECTRICAL

Equipped standard with fixed output driver. Optional 0-10V continuous dimming driver that works with any standard 0-10V control/dimmer. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs.

CERTIFICATION

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

WARRANTY

5-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

ORDERING INFORMATION

Example Model Number: LSC-51-MV-850-P

SERIES	RATED WATTAGE	DRIVER TYPE	CRI AND KELVIN	OPTIONS
LSC	40- 40W (4998 Lumens) 70- 70W (9703 Lumens) ¹	MV- 120-277V ¹ MVD-120-277V, 0-10V Dimming	850- 80 CRI; 5000 Kelvin	P- Photocell MOS- Integral Microwave Sensor EML8- Emergency Battery Pack, 800 Lumens EML16- Emergency Battery Pack, 1400 Lumens

Notes:
¹Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
²DLC Listed
³DLC Premium Listed