

Item#: PLT-20216 LED 6" COMMERCIAL CAN INDOOR FIXTURE


FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-0n
- For covered ceilings only
- Suitable for TYPE IC Inherently Protected

APPLICATION

Ideal for retrofitting inefficient light sources for tall ceilings found in offices, airports, retail, malls, hospitals, lobbies and other commercial applications.

LIGHT DISTRIBUTION CURVE



ELECTRICAL

Wattage	25W	
Voltage	110-277V	
Power Factor	0.9	
Total Harmonic Distortion (THD)	17	
LIGHTING PERFORMANCE		
Lumens	2000	
Lumens Per Watt (Lm/W)	80	
Color Temperature (CCT)	4000K	
Color Rendering (CRI)	80	
R9 (Red Value)	15	
R13 (Skin Tones)	84	
Beam Angle	50°	
Light Distribution	Type VS	
Dimmable Lighting Control	("Dimmable 0-10V, Range 10% - 100%	
ENVIRONMENT		
Operating Temperature	-40° ~ 104°F	
Suitable Location	DAMP Indoor / Covered Ceilings	
Ingress Protection Rating	IP43	
LIFESPAN		
Average Life (Hours)	48,000	
Warranty (Years)	5	
COMPONENTS		
LED Light Source	SMD3030	

CONSTRUCTION

Driver

Housing	Aluminum Alloy	
Base / Power Supply	Hard Wired	
Finish	Reflective	

QUALIFICATIONS







Visit www.energystar.gov to confirm Energy Star qualification. - Published lumens on LED products are approximate and may vary slightly.


914426

Item#: PLT-20216 LED 6" COMMERCIAL CAN

DIMENSIONS (Inches)

Length (MOL)	5.6"
Width/Diameter (MOD)	7.6"
Weight (Lbs)	

Line drawings may not be to scale and are for general reference only.

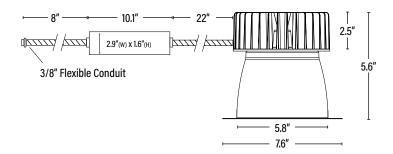

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768020670		
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE	
PLT-20216	LED COMMERCIAL 6" CAN/25W/40K/110-277V/DIMMABLE - ENERGY STAR®	1	
ACCESSORIES/REPLACEMENT PARTS			
PLT-20252	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN - INTEGRATION TYPE	1	

Note: The trim color of the 6" cans has been switched from chrome to white as of 2018, stock left over from 2017 will still have chrome trim.