

T8 14.5W 4FT. BYP TITANIUM LED SERIES



PRO



14.5W REPLACES



**32W
Fluo.**

60% Energy Savings

\$128 Savings per fixture*

- Wide beam design: 310° light emitting area
- Suitable for use in totally enclosed fixtures
- End-to-end lighting with no dark spots
- Frosted glass tube for increased light diffusion efficiency
- Exceptional efficacy 117 LPW
- Built-in universal voltage driver - Bypass installation




TUBE FEATURES

Extra Wide Beam Design - Frosted Glass Body

This lamp uses an innovative coated glass design that diffuses heat and light more evenly than plastic. As a result of its compact light engine, this lamp produces a light emitting area of 310°. This wider beam angle improves a fixture's total light distribution and creates a more complete lighting effect.



Lamp Front View

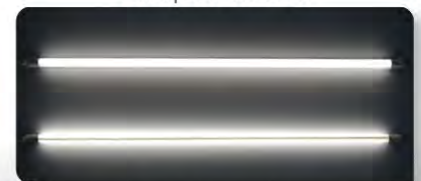


Lamp Back View

End-to-End Lighting - Micro-Designed Driver

GREEN CREATIVE




Other LED Tubes

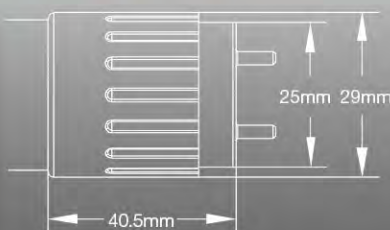

The lamp's micro-designed driver is located within the tube end cap which allows for better thermal performance and no dark spots. The result is powerful and seamless light from end to end.

BYPASS INSTALLATION

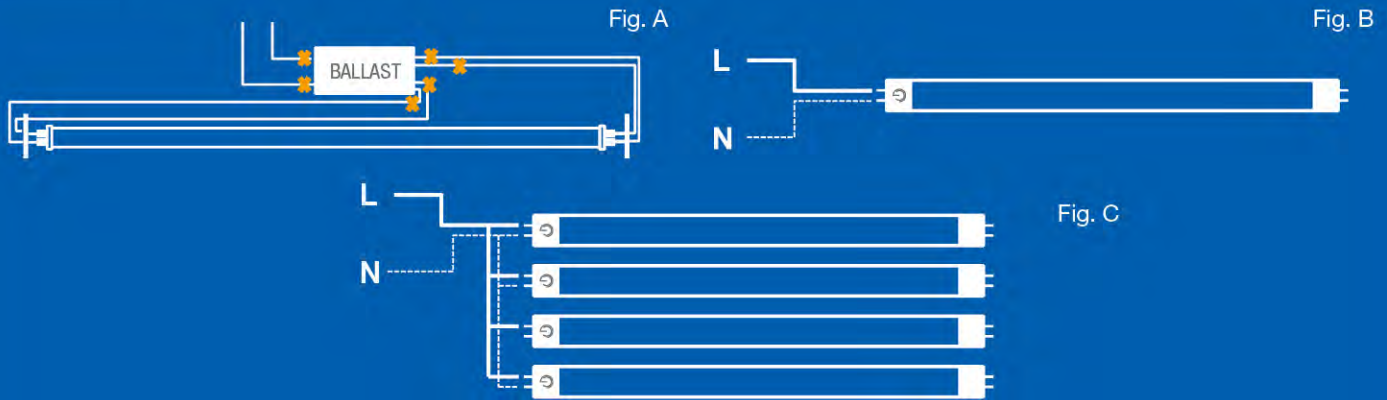

- Bypass ballast by cutting all wires as in Fig. A
- Directly wire Live + Neutral on a single end as in Fig. B for single tube or as in Fig. C for multiple tubes
- Replace shunted lamp holder with non-shunted one if applicable (Instant Start)
- Existing fixture maintains original UL compliance thanks to UL1598C tube

SPECIFICATIONS***

| Product Model | 97720 14.5T8/4F/830/BYP | 97721 14.5T8/4F/835/BYP | 97722 14.5T8/4F/840/BYP |
|-----------------------------|----------------------------|----------------------------|----------------------------|
| Type | T8 | T8 | T8 |
| Base | Medium Bi-Pin G13 | Medium Bi-Pin G13 | Medium Bi-Pin G13 |
| Power (W) | 14.5 | 14.5 | 14.5 |
| Voltage - Frequency | 120-277V 50-60Hz | 120-277V 50-60Hz | 120-277V 50-60Hz |
| Color Temp. (ANSI) | Warm White 3000K | Neutral White 3500K | Natural White 4000K |
| CRI (Ra) | 80 | 80 | 80 |
| Typical lumens (lm) | 1600 | 1650 | 1700 |
| Efficacy (LPW) | 110 | 114 | 117 |
| Light Emitting Area | 310° | 310° | 310° |
| Beam Angle | 160° | 160° | 160° |
| Dimmable | No | No | No |
| Power Factor | 0.9 | 0.9 | 0.9 |
| THD | <20% | <20% | <20% |
| Rated Lifetime - L70 (hrs.) | 50,000 | 50,000 | 50,000 |
| Dia. x MOL | 1.14"x47.76" (29x1213mm) | 1.14"x47.76" (29x1213mm) | 1.14"x47.76" (29x1213mm) |
| Weight (lb. / g) | 0.57lb. / 259g | 0.57lb. / 259g | 0.57lb. / 259g |

* Savings per fixture based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, 2x36W fixture / \$10 fluorescent tube, \$45 ballast with 15,000 hr lifetime, \$35 LED tube with 50,000 hr lifetime

** Suitable for use in totally enclosed fixtures

*** Specification data is preliminary and may be subject to change

**** Suitable for damp locations. Not for use where directly exposed to the weather or water

***** Full installation guide and more details available on website