



# TRACK 33W L HIGH CRI

Preliminary Specifications



## DIMENSIONS

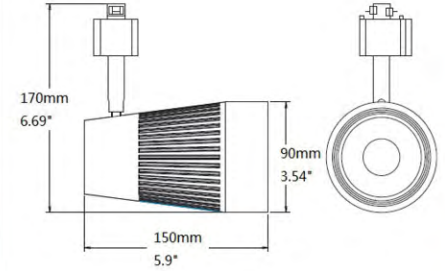

PRO



- ⌚ Exceptional color rendering CRI 90+
- ⌚ 2300 lumen output replaces 39W HID
- ⌚ Field interchangeable lens comes in NF & FL standard
- ⌚ Sleek design, integrated driver
- ⌚ Tight binning: 3-step Macadam ellipse



COMPATIBLE WITH H, J & L TRACK TYPE



# TRACK 33W L HIGH CRI

## Preliminary Specifications

### SPECIFICATIONS\*

| Product                            | 33TRLG4DIM/927/_/_                  | 33TRLG4DIM/930/_/_                  | 33TRLG4DIM/940/_/_<br>(MTO)         |
|------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| <b>Track Type</b>                  | H/J/L (L-MTO)                       | H/J/L (L-MTO)                       | H/J/L (L-MTO)                       |
| <b>Power (W)</b>                   | 33.8                                | 33.8                                | 33.8                                |
| <b>Voltage - Frequency</b>         | 120V 60Hz                           | 120V 60Hz                           | 120V 60Hz                           |
| <b>Color Temp. (ANSI)</b>          | Warm White 2700K                    | Warm White 3000K                    | Natural White 4000K                 |
| <b>CRI (Ra) (typ.)</b>             | 90                                  | 90                                  | 90                                  |
| <b>Typical lumens (lm)</b>         | 2200                                | 2300                                | 2400                                |
| <b>Efficacy (LPW)</b>              | 65                                  | 68                                  | 71                                  |
| <b>Beam Angle</b>                  | NF 25° / FL 38°                     | NF 25° / FL 38°                     | NF 25° / FL 38°                     |
| <b>CBCP (cd)</b>                   | 10,000 / 5150                       | 10,350 / 5250                       | 11,000 / 5650                       |
| <b>Dimmable</b>                    | Yes                                 | Yes                                 | Yes                                 |
| <b>Power Factor</b>                | 0.9                                 | 0.9                                 | 0.9                                 |
| <b>Rated Lifetime - L70 (hrs.)</b> | 40,000                              | 40,000                              | 40,000                              |
| <b>H x L x Dia.</b>                | 6.69"x5.90"x3.54"<br>(170x150x90mm) | 6.69"x5.90"x3.54"<br>(170x150x90mm) | 6.69"x5.90"x3.54"<br>(170x150x90mm) |
| <b>Weight (lb. / g)</b>            | 1.31lb / 595g                       | 1.31lb / 595g                       | 1.31lb / 595g                       |
| <b>Finish</b>                      | White / Black                       | White / Black                       | White / Black                       |

### ORDERING INFORMATION

| Model                       | Finish         | Track Type          |
|-----------------------------|----------------|---------------------|
| 33TRLG4DIM/927/             | <b>W-White</b> | <b>H-Halo</b>       |
|                             | <b>B-Black</b> | <b>J-Juno</b>       |
|                             |                | <b>L-Lightolier</b> |
| Example: 33TRLG4DIM/927/W/J |                |                     |

**Note: Every product comes standard with NF 25° mounted lens and FL 38° accessory lens.**

\* Specification data is preliminary and may be subject to change