


# TRACK 22W M HIGH CRI

Preliminary Specifications



## DIMENSIONS

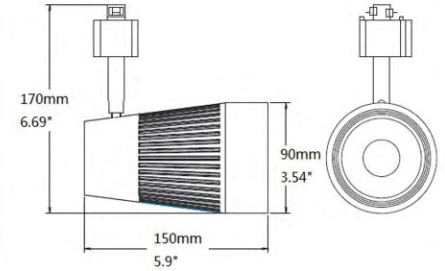

PRO



- ⌚ Exceptional color rendering CRI 90+
- ⌚ 1250 lumen output replaces 20W HID
- ⌚ Field interchangeable lens comes in NF & FL standard
- ⌚ Sleek design, integrated driver
- ⌚ Tight binning: 3-step Macadam ellipse




40,000 H



DIMMABLE



EFFICACY



WARRANTY



CRI (Ra)



DIRECTIONAL



COMPATIBLE WITH H, J & L TRACK TYPE



# TRACK 22W M HIGH CRI

## Preliminary Specifications



Ref.#DS042-TRIM-22W

### SPECIFICATIONS\*

Product	22TRMG4DIM/927/ / _	22TRMG4DIM/930/ / _	22TRMG4DIM/940/ / _ (MTO)
<b>Track Type</b>	H/J/L (L-MTO)	H/J/L (L-MTO)	H/J/L (L-MTO)
<b>Power (W)</b>	22	22	22
<b>Voltage - Frequency</b>	120V 60Hz	120V 60Hz	120V 60Hz
<b>Color Temp. (ANSI)</b>	Warm White 2700K	Warm White 3000K	Natural White 4000K
<b>CRI (Ra) (typ.)</b>	90	90	90
<b>Typical lumens (lm)</b>	1200	1250	1300
<b>Efficacy (LPW)</b>	55	57	59
<b>Beam Angle</b>	NF 25° / FL 38° / SP 15° (opt.)	NF 25° / FL 38° / SP 15° (opt.)	NF 25° / FL 38° / SP 15° (opt.)
<b>CBCP (cd)</b>	6300 / 3250 / 12, 200	6700 / 3450 / 13,000	6900 / 3600 / 13,500
<b>Dimmable</b>	Yes	Yes	Yes
<b>Power Factor</b>	0.9	0.9	0.9
<b>Rated Lifetime - L70 (hrs.)</b>	40,000	40,000	40,000
<b>H x L x Dia.</b>	6.69"x5.90"x3.54" (170x150x90mm)	6.69"x5.90"x3.54" (170x150x90mm)	6.69"x5.90"x3.54" (170x150x90mm)
<b>Weight (lb. / g)</b>	1.31lb / 595g	1.31lb / 595g	1.31lb / 595g
<b>Finish</b>	White / Black	White / Black	White / Black

### ORDERING INFORMATION

Model	Finish	Track Type
<b>22TRMG4DIM/927/</b>	<b>W-White</b>	<b>H-Halo</b>
	<b>B-Black</b>	<b>J-Juno</b>
		<b>L-Lightolier</b>
<b>Example: 22TRMG4DIM/927/W/J</b>		
<b>Note: Every product comes standard with NF 25° mounted lens and FL 38° accessory lens. SP 15° lens can be ordered separately.</b>		

\* Specification data is preliminary and may be subject to change