



TECHNICAL DATA SHEET

PLT-20225

LED SLIM CUTOFF WALL PACK

OUTDOOR FULL-CUTOFF WALL-MOUNTED
AREA LUMINAIRES


FEATURES

- High pressure die casting housing, anti-static powder painting.
- High thermal conductive material and high efficiency cooling system.
- Fixture angle can be easily adjusted 0-90°.
- Wall mount only.

APPLICATION:


Replaces traditional 150-250W HID lamps. Wall washing, perimeter lighting and parking lots.

PRODUCT DETAILS

ELECTRICAL	
Wattage	50W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	18.2
LIGHTING PERFORMANCE	
Lumens	5700
Lumens Per Watt (Lm/W)	114
Color Temperature (CCT)	5000K
Color Rendering (CRI)	70
Beam Angle	100° x 80°
Light Distribution	Type II, Very Short
Dimmable Lighting Control	
ENVIRONMENT	
Operating Temperature	-40°C ~ 40°C
Suitable Location	WET
Ingress Protection Rating	IP65
LIFESPAN	
Average Life (Hours)	50,000
Warranty (Years)	5
CERTIFICATIONS	



COMPONENTS	
LED Light Source	Luxeon 3030 2D
Driver	PFU60S-40
CONSTRUCTION	
Housing	Aluminum
Base / Power Supply	Hard Wired
Finish	Bronze
PACKAGING	
Master Carton	8pc / 10811768026686
Individual Box	811768026689
Country of Origin	China
HS Tariff	9405.40.6000
DIMENSIONS	
Dimensions (Inches)	8.3"(L) x 6.7"(W) x 3.7" (H)

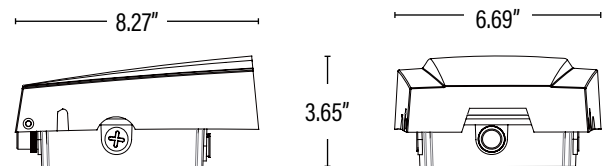

ORDERING

ITEM#	DESCRIPTION	CASE
PLT-20225	LED SLIM CUTOFF WALL PACK 50W/50K/120-277V	8