

FEATURES

- System Light Efficacy 130 LPW
- Easy Installation & Maintenance
- IP65
- 5 Year Warranty
- Optional Shade Included for Field Installation
- ETL and DLC Listed
- DLC® part no: PLTE6213



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10941	4000	20800	80	160	120-277	YES	RING	155000	5 years
-----------	------	-------	----	-----	---------	-----	------	--------	---------

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 130 LPW
- Superior Heat Management

TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

WARRANTY

WARRANTY **5 Years**



SPECIFICATIONS

PERFORMANCE

Philips Lumileds LED Chip
 20,800 Lumen Output (IES)
 160W Power Consumption
 ≥130 lm/W Efficacy (IES)
 4000K Color Temperature
 ≥80 CRI
 L70>155,000 Hours Lumen Maintenance
 120-277 VAC Input Voltage
 0.95 Power Factor



ENVIRONMENTAL

IP-65 Rating
 -30 to 45°C Operating Temperature
 15% to 90% RH Humidity

PHYSICAL

Dimensions (16.1 x 16.1 x 19.7 in.)
 Weight 9.3 lbs.
 Hanging Ring Mounting Options
 Fixture Material Aluminum Alloy

PHOTOMETRICS

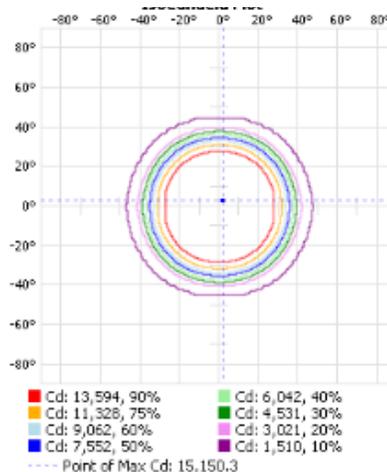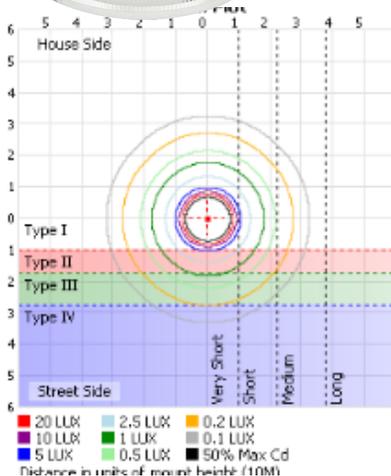

Distance	Center Beam LUX	Beam Width
2.0M	3,771.6 LUX	2.8 M 2.8 M
4.0M	942.9 LUX	5.6 M 5.7 M
6.0M	419.1 LUX	8.3 M 8.5 M
8.0M	235.7 LUX	11.1 M 11.3 M
10.0M	150.9 LUX	13.9 M 14.2 M

■ Vert. Spread: 69.6°
 ■ Horiz. Spread: 70.6°