

## FEATURES

- System Light Efficacy 130 LPW
- Easy Installation & Maintenance
- IP65
- **5** Year Warranty
- Optional Shade Included for Field Installation
- ETL and DLC Listed



**50% ENERGY EFFICIENCY & LONG LIFE**  
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS  
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	-----	---------	---------	------	----------	------------	----------

PLT-10956	5000	13000	70	100	120-277	YES	RING	155000	5 years
-----------	------	-------	----	-----	---------	-----	------	--------	---------

## ADDITIONAL PHOTOS



## FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 130 LPW
- Superior Heat Management

## TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

## WARRANTY

**WARRANTY**

**5 Years**



## SPECIFICATIONS

### PERFORMANCE

Philips Lumileds LED Chip  
13,000 Lumen Output (IES)  
100W Power Consumption  
≥130 lm/W Efficacy (IES)  
5000K Color Temperature  
≥70 CRI  
L70>155,000 Hours Lumen Maintenance  
120-277 VAC Input Voltage  
0.95 Power Factor



### ENVIRONMENTAL

IP-65 Rating  
-30 to 45°C Operating Temperature  
15% to 90% RH Humidity

### PHYSICAL

Dimensions (12.2 x 12.2 x 16.5 in.)  
Weight 7.5 lbs.  
Hanging Ring Mounting Options  
Fixture Material Aluminum Alloy

## PHOTOMETRICS

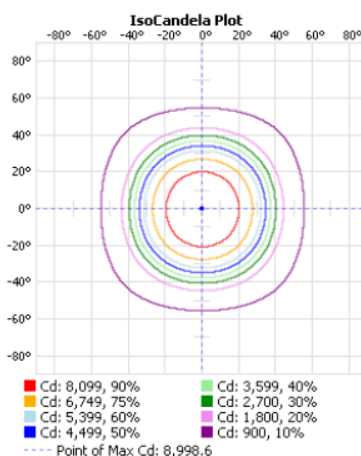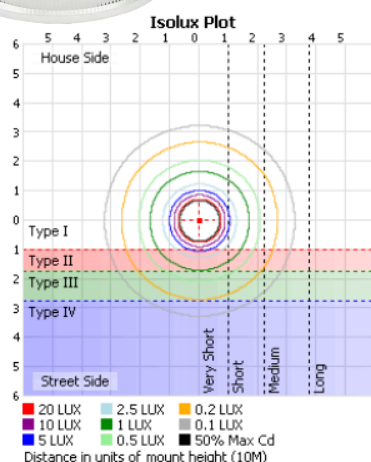

**Illuminance at a Distance**

	Center Beam LUX	Beam Width
2.0M	2,249.6 LUX	2.7 M 2.7 M
4.0M	562.4 LUX	5.5 M 5.5 M
6.0M	250.0 LUX	8.2 M 8.2 M
8.0M	140.6 LUX	11.0 M 10.9 M
10.0M	90.0 LUX	13.7 M 13.7 M

Vert. Spread: 68.8°  
Horiz. Spread: 68.6°