

FEATURES

- System Light Efficacy 130 LPW
- Easy Installation & Maintenance
- IP65
- Five Year Warranty
- Optional Shade Included for Field Installation
- ETL and DLC Listed



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-10903	5000	20800	70	160	120-277	YES	RING	155000	5 years

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 130 LPW
- Superior Heat Management

TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

WARRANTY

WARRANTY **5 Years**



SPECIFICATIONS

PERFORMANCE

Philips Lumileds LED Chip
 20,800 Lumen Output (IES)
 160W Power Consumption
 ≥130 lm/W Efficacy (IES)
 5000K Color Temperature
 ≥70 CRI
 L70>155,000 Hours Lumen Maintenance
 120-277 VAC Input Voltage
 0.95 Power Factor



ENVIRONMENTAL

IP-65 Rating
 -30 to 45°C Operating Temperature
 15% to 90% RH Humidity

PHYSICAL

Dimensions (16.1 x 16.1 x 19.7 in.)
 Weight 9.3 lbs.
 Hanging Ring Mounting Options
 Fixture Material Aluminum Alloy

PHOTOMETRICS

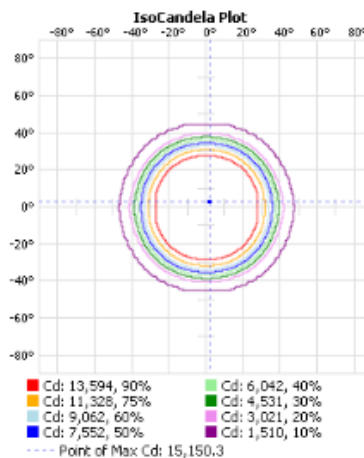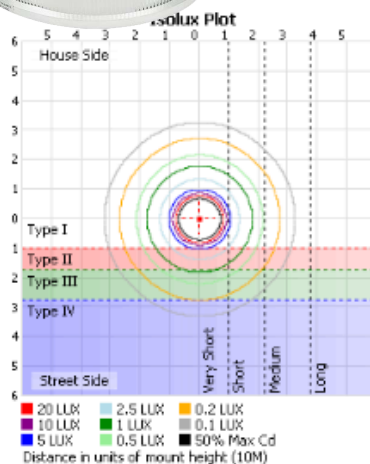

Illuminance at a Distance

Center Beam LUX	Beam Width	
3,771.6 LUX	2.8 M	2.8 M
942.9 LUX	5.6 M	5.7 M
419.1 LUX	8.3 M	8.5 M
235.7 LUX	11.1 M	11.3 M
150.9 LUX	13.9 M	14.2 M

■ Vert. Spread: 69.6°
 ■ Horiz. Spread: 70.6°