

LED HIGH BAY



FEATURES



- For Commercial and Industrial Buildings
- 750 Watt Metal Halide Equivalent
- Compatible with 1-10V Dimmer
- UL Listed for Damp Locations
- 120° Beam Angle
- IP65 Rating



ENERGY EFFICIENCY & LONG LIFE
75% MORE ENERGY EFFICIENT THAN STANDARD
MH LAMPS TYPICAL PAYBACK OF 1 - 3 YEARS

SKU#	Kelvin	Lumens	Shape	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-11083-4K	4000	26,400	Round	200	120-277	NO	Ring	35,000	5 Years

ADDITIONAL PHOTOS

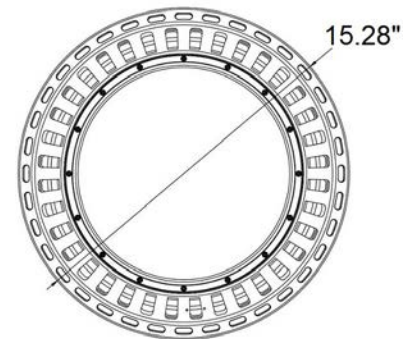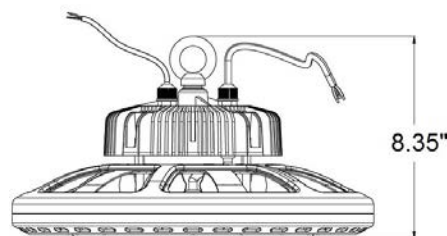

FEATURES

- Polycarbonate Lens
- Lightweight design
- LED Driver Included

SPECIFICATIONS

DIMMABLE	YES
DLC LISTED	NO
SAFETY RATING	UL
CRI80
COLOR	COOL WHITE
COLOR TEMPERATURE	4000K
LIFE HOURS	35,000
WATTAGE	200 WATTS
LUMENS	26,400
VOLTAGE	120-277
FINISH.....	BLACK
HOUSING	ALUMINUM
MOUNTING	RING MOUNT
LENS	POLYCARBONATE
DIAMETER	15.28 IN.
HEIGHT	8.35 IN.
WEIGHT	10.2 LBS.

TYPICAL APPLICATIONS

- Industrial Factories
- Distribution Centers
- Cold Storage Facilities

WARRANTY

Warranty

5 Years

PHOTOMETRICS

