

LED PANEL



FEATURES

- USA approved LM-80 SMD
- UL DLC LM79 certified
- Input Voltage: 120-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 60%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 36,000 hours



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

PLT-10534	4000	5200	2X4	52	120-277	YES	CEILING	36000	5 years
-----------	------	------	-----	----	---------	-----	---------	-------	---------

ADDITIONAL PHOTOS



FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

TYPICAL APPLICATIONS

- Hotels, Schools, Factories
- Office, Hospitals

WARRANTY


Warranty

5 Years

SPECIFICATIONS

Dimmable	Yes
DLC Listed	Yes
Safety Rating	UL
CRI	80
Color	Cool White
Color Temperature	4000 Kelvin
Life Hours	36000
Wattage	52 Watt
Lumens	5200
Voltage	120/208/240/277
Finish	White
Housing	N/A
Mounting	Ceiling Grid Mount/Suspended
Lens	Opaque
Length	48 in.
Height	3.8 in.
Width	24 in.
Weight	14 lbs.
Warranty	5 Years

PHOTOMETRICS

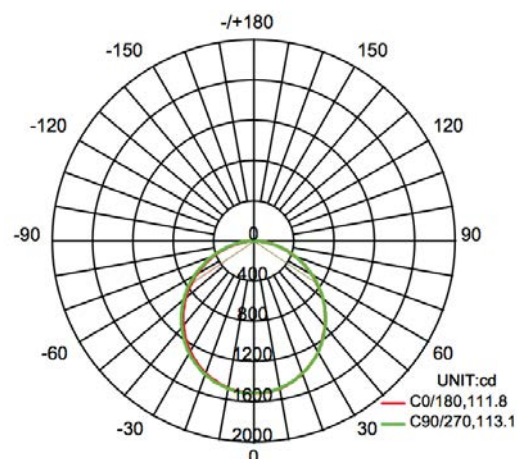

AVERAGE BEAM ANGLE(50%):112.4 DEG

