

Type
Project
Catalog No.
Lamp/Wattage

**NHRIC-926QAT**  
**6" IC Remodel Sloped Ceiling Housing**  
 Lamp: (1) 75PAR/R30 or (1) 40A19

**PRODUCT DESCRIPTION**

Six in ch thermally protected universal incandescent downlight for use in 2/12 - 6/12 pitch sloped ceilings. Rated for direct contact with insulation.

**CONSTRUCTION**

**Maximum Angle**

Pitch: 12/12; Angle: 45° (with designated trim)

**HOUSING**

.035 white finished housing. Riveted wrap and dome cap construction. Integral fold-out torsion spring brackets. Knockouts near top of housing provided for coil springs. Structural arm constructed of .045 galvanized steel connects housing to electrical junction box.

**AIR FLOW RESTRICTION**

Airtight (AT) unit restricts air flow to Plenum to ≤ 1.5 ft<sup>3</sup> / minute to comply with Washington State Electric Code (WSEC).

**ELECTRICAL**

**SOCKET**

Standard medium base socket with protective cap included to protect electrical connection during ceiling painting. Heavy duty .095 curved steel bracket allows lamp position adjustment to compensate for ceiling pitch. Wing nuts lock desired angles

**JUNCTION BOX**

Plaster frame integrated 25 cu. in. junction box .060 galvanized steel with three 1/2", two 3/4", and four Romex connecting pryouts. Electrical connections are made through one side of the junction box wrap. Electrical grounding automatic when feeding with grounded steel EMT pipe or flex. Green wire provided for installations with ground wire fed through PVC pipe conduit.

**LAMP**

(1) 75PAR/R30  
 (1) 40A19

**THERMAL PROTECTOR**

Standard UL thermal protector rated for 90 degrees Celsius is affixed to interior surface of fixture housing.

**ACCESSORIES** *sold separately*

NT-28	Eyeball Trim	White, Black
NT-29	Eyeball Trim	Copper, Gold
NTM-52	Open Gimbal Ring	White, Black, Copper, Gold
NTP-614	Deep Baffle	White, Black
NTS-615	Reflector	White, Black, Copper, Gold


**LABELS AND LISTINGS**

cULus Listed for damp locations, Junction box listed for maximum of 8 #12AWG conductors for feed-through.



**DIMENSIONS**

**NHRIC-926QAT**

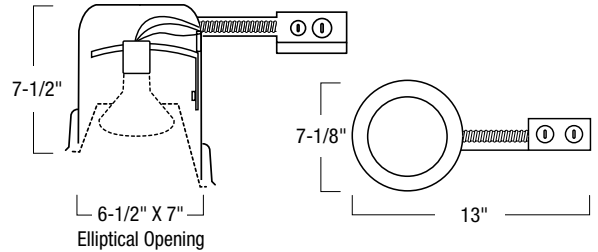

Opening : 6-1/2" x 7"  
 Height : 7-1/2"  
 Width: 7-1/8"  
 Length: 13"

**6" IC Remodel Sloped Ceiling Housing**

Catalog No.
<b>NHRIC-926QAT</b>