



FEATURES

- USA approved LM-80 SMD
- UL DLC LM79 certified
- Input Voltage: 120-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 60%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 36,000 hours





50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

PLT-10533	5000	5000	2X2	48	120-277	YES	CEILING	36000	5 years
-----------	------	------	-----	----	---------	-----	---------	-------	---------

ADDITIONAL PHOTOS

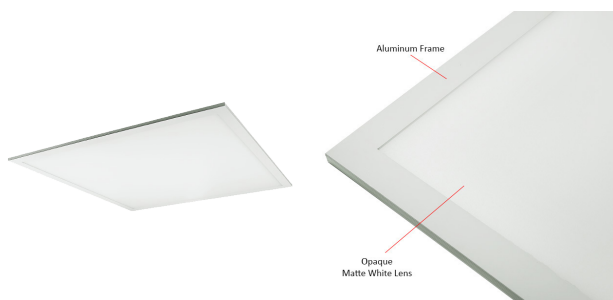

FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

TYPICAL APPLICATIONS

- Hotels, Schools, Factories
- Office, Hospitals

WARRANTY


Warranty

5 Years

SPECIFICATIONS

Dimmable Yes
 DLC Listed Yes
 Safety Rating UL
 CRI80
 Color..... Stark White
 Color Temperature..... 5000 Kelvin
 Life Hours36000
 Wattage48 Watt
 Lumens.....5000
 Voltage 120/208/240/277
 Finish..... White
 Housing N/A
 MountingCeiling Grid Mount/Suspended
 Lens Opaque
 Length 24 in.
 Height 3.8 in.
 Width 24 in.
 Weight 7.5 lbs.
 Warranty 5 Years

PHOTOMETRICS

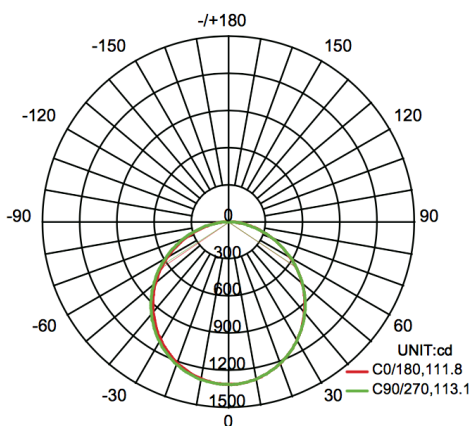

AVERAGE BEAM ANGLE(50%):112.5 DEG

