



# HID LED 25W 277V E26 TITANIUM LED SERIES




## APPLICATIONS

### Bollard Lighting



### Post Top Lighting

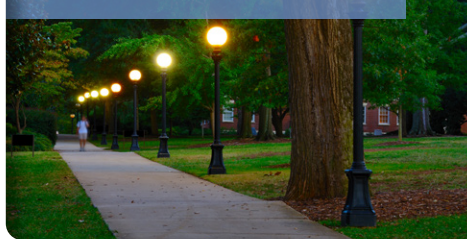

### Low Bay Lighting



## SPECIFICATIONS

Product	97972	<b>97973</b>	97974
Model	25HID/830/277V/E26	25HID/840/277V/E26	25HID/850/277V/E26
Type	A23	A23	A23
Base	E26	E26	E26
Power (W)	25	25	25
Voltage - Frequency	120-277V 50/60Hz	120-277V 50/60Hz	120-277V 50/60Hz
Color Temp. (ANSI)	Warm White 3000K	Cool White 4000K	Daylight 5000K
CRI (Ra) (typ.)	82	82	82
Typical lumens (lm)	3200	3300	3400
Efficacy (LPW)	128	132	136
Beam Angle	290°	290°	290°
Dimmable	No	No	No
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	50,000	50,000	50,000
Temperature Rating	-4°F/-20°C - 95°F/35°C	-4°F/-20°C - 95°F/35°C	-4°F/-20°C - 95°F/35°C
Dia. x MOL	3.23"x6.34" (82x161mm)	3.23"x6.34" (82x161mm)	3.23"x6.34" (82x161mm)
Weight (lb. / g)	1.04lb. / 470g	1.04lb. / 470g	1.04lb. / 470g

## HID EQUIVALENCE

GREEN CREATIVE HID LED		Metal Halide		Mercury Vapor		High Pressure Sodium	
Power	Lumens	Power	Mean Lumens	Power	Mean Lumens	Power	Mean Lumens
25W	3300	70W	3400	100W	3300	50W	3600

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$12 HID with 10,000-hr lifetime, \$70 ballast, \$60 LED HID with 50,000-hr lifetime

\*\* Suitable for use in totally enclosed fixtures

\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

Ref.#: DS246-HID-LED-25W-277V-E26-250118