ILB-CP-HE-SD WITH TBTS TEST ACCESSORY

COMMON

WHITE

AC (NORMAL) DRIVER

LED OUTPUT (-)

LED OUTPUT (+)

LED INPUT(+)

LED INPUT (-)

LED LOAD

AC INPUT (120 TO 277V)

SWITCHED OR UNSWITCHED HOT

BLK/WHT

BLACK

WHITE

IOTA ILB-CP-HE-SD EMERGENCY DRIVER

RED (+)

BLUE (-)

RED/WHT (+)

BLUE/WHT (-)

UNSWITCHED 24/7 POWER

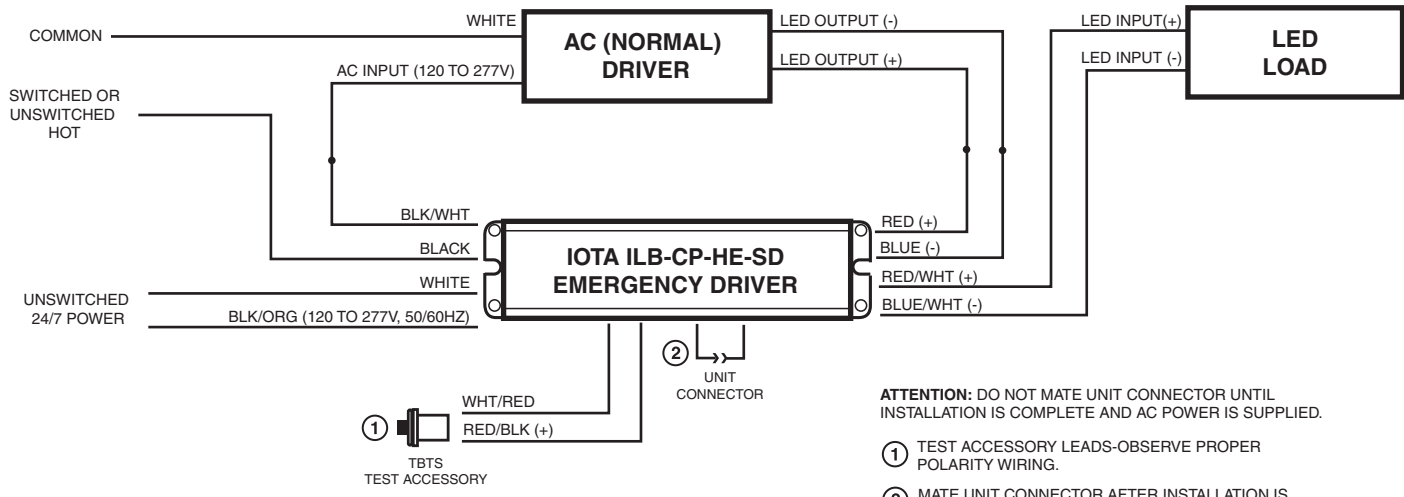BLK/ORG (120 TO 277V, 50/60HZ)

② UNIT CONNECTOR

WHT/RED

RED/BLK (+)

① TBTS TEST ACCESSORY

ATTENTION: DO NOT MATE UNIT CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.

① TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.

② MATE UNIT CONNECTOR AFTER INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED

ILBCP_TBTS_SD.EPS

NOTES

IOTA
POWERING YOUR WAY ®