

Updated 2.13.13

xPAR™-38

Fixed Wattage, Ultra-Light
NON-DIMMABLE



The high power xPAR38 lamps from MSI are 14W fixed 100-watt incandescent PAR lamp. This amazing lamp brings together the latest innovation and experience from MSI's multiple engineering disciplines to deliver the complete solution for retail, hospitality, furniture, museum and commercial applications.

PRODUCT SUMMARY

- Fixed Wattage
- Non-Dimmable
- Multiple Color Temperatures Available
- Custom Optics
- Proprietary Crimpfin Heatsink Design
- Halogen PAR form factor (ANSI compliant)
- No UV or IR radiation
- Voltage: 120v -220v
- 0.9 Power Factor
- SocketType: Medium Screw Base
- Environment: Dry
- Length: 5 in, 127 mm
- Diameter: 4.8 in, 122 mm
- Weight: 8.32 ounces, 236 g

• Note: Subject to change

xPAR-38

120~

220~

MEDIUM

2700K

3000K

4000K

15°

25°

UV

lighting
facts

UL
LISTED

RoHS

FC


Catalog #	Power	CCT (K)	CRI	Beam Angle	Lumens	CBCP
xPAR38271514T3N	14W	2700	82	15°	980	9,700
xPAR38272514T3N				25°		4,604
xPAR38301514T3N	14W	3000	82	15°	1025	10,750
xPAR38302514T3N				25°		4,729
xPAR38401514T3N	14W	4000	82	15°	1100	11,850
xPAR38402514T3N				25°		4,630

xPAR™-38


CANDELA DISTRIBUTION

15°

3000K

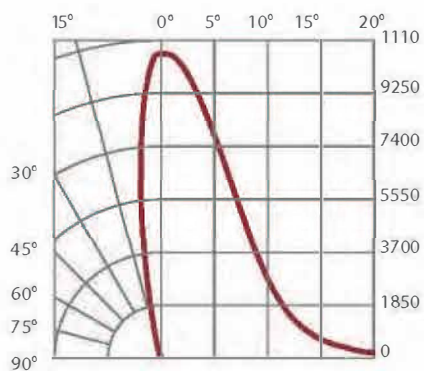

BEAM DISTRIBUTION


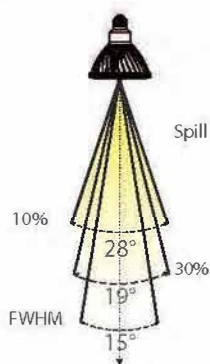


0° AIMING FOOTCANDLES

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	1.3'	430
10'	2.6'	108
15'	3.9'	48
20'	5.3'	27

25°

3000K

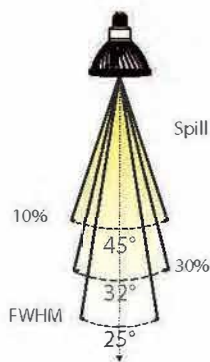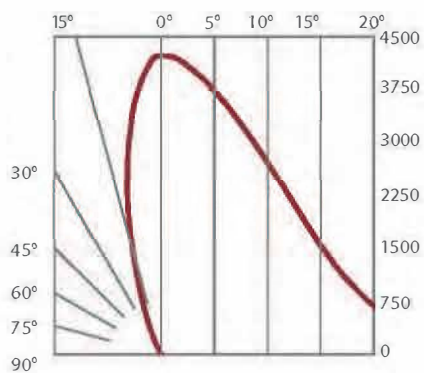

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	2.2'	170
10'	4.4'	43
15'	6.7'	19
20'	8.9'	11

CAUTION: Risk of electric shock Do not open, no user serviceable parts inside. Use In dry locations only. Turn power off before inspection, installation, or removal. Not intended for use with emergency exit fixtures or emergency exit lights. Not for use where exposed to the weather.