T8 Replacement Tube

TRUE UNIVERSAL

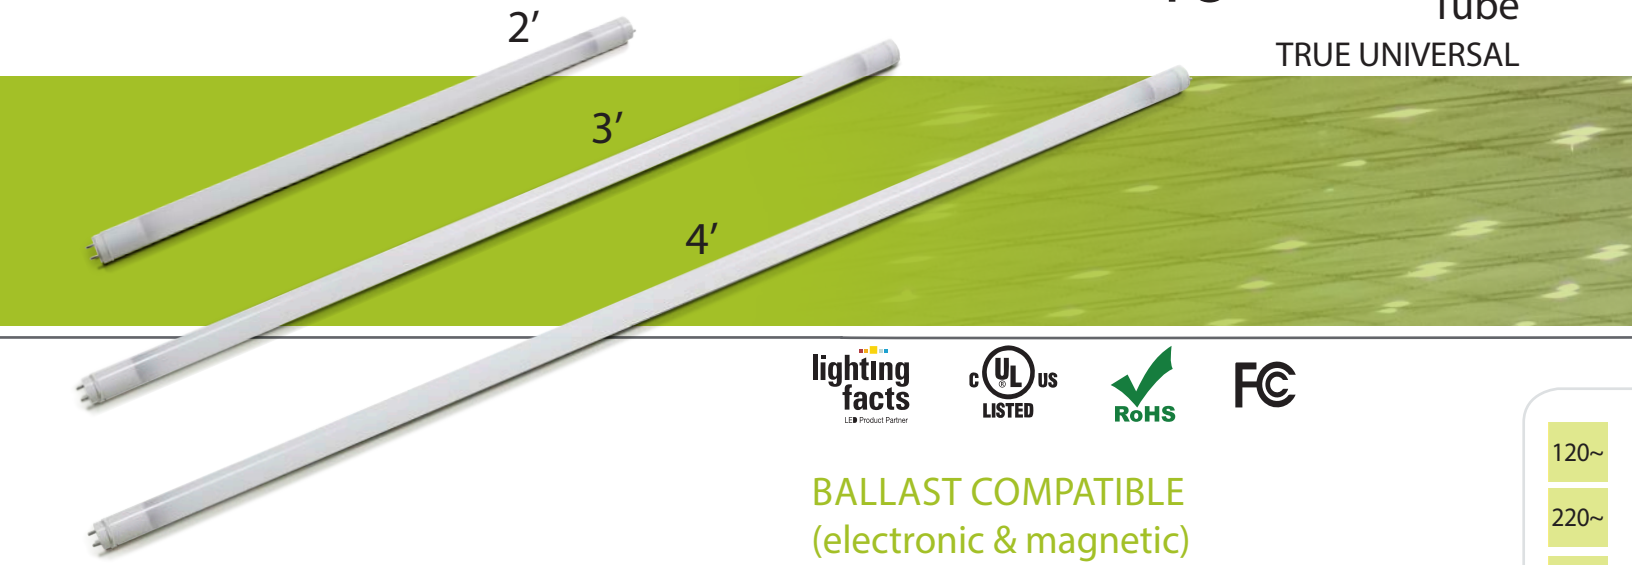

PRODUCT SUMMARY

- Smooth Diffusion
- No Hot Spots/No Dark Spots
- Multi Voltage 120/220/277
- Suitable for Damp Locations
- Wide Beam
- Uniform Light Distribution
- Shatterproof
- Contains no Mercury
- Impact Resistant
- Runs Cool

BALLAST COMPATIBLE (electronic & magnetic)

- Instant Start
- Rapid Start
- Program Start
- Quick Start
- Magnetic
- No Rewiring Required
- Low THD <10%
- High Power Factor

LINE VOLTAGE COMPATIBILITY (universal)

- 120v-277v
- Low THD <10%
- High Power Factor

120~
220~
277~
3500K
4100K
4′
3′
2′
105°
UV

CATALOG	POWER	CCT (K)	LENGTH	CRI	LUMENS
zT82435123E-X	12W	3500	2′	>80	1300
zT82441123E-X	12W	4100	2′	>80	1300
zT83635153E-X	15W	3500	3′	>80	1600
zT83641153E-X	15W	4100	3′	>80	1600
zT84835183E-X	18W	3500	4′	>80	2000
zT84841183E-X	18W	4100	4′	>80	2000

- -X = Ballast and Line Compatible
- -B = Ballast Only
- -L = Line Only