


# T8 Replacement Tube

TRUE UNIVERSAL

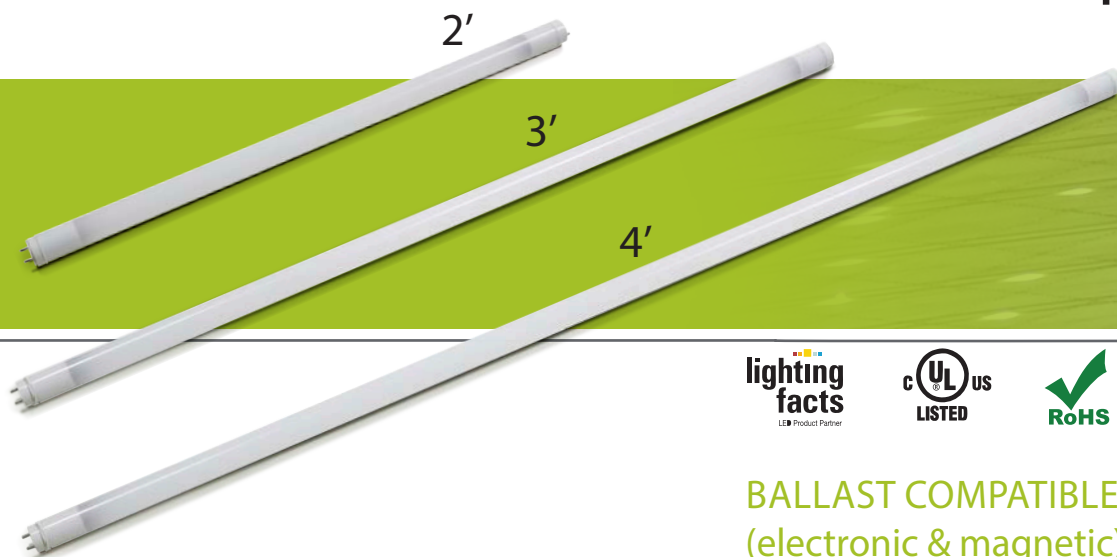

## PRODUCT SUMMARY

- Smooth Diffusion
- No Hot Spots/No Dark Spots
- Multi Voltage 120/220/277
- Suitable for Damp Locations
- Wide Beam
- Uniform Light Distribution
- Shatterproof
- Contains no Mercury
- Impact Resistant
- Runs Cool



## BALLAST COMPATIBLE (electronic & magnetic)

- Instant Start
- Rapid Start
- Program Start
- Quick Start
- Magnetic
- No Rewiring Required
- Low THD <10%
- High Power Factor

## LINE VOLTAGE COMPATIBILITY (universal)

- 120v-277v
- Low THD <10%
- High Power Factor

- 120~
- 220~
- 277~
- 3500K
- 4100K
- 4'
- 3'
- 2'
- 105°
- UV
- Water

CATALOG	POWER	CCT (K)	LENGTH	CRI	LUMENS
zT82435123E-X	12W	3500	2'	>80	1300
zT82441123E-X	12W	4100	2'	>80	1300
zT83635153E-X	15W	3500	3'	>80	1600
zT83641153E-X	15W	4100	3'	>80	1600
zT84835183E-X	18W	3500	4'	>80	2000
<b>zT84841183E-X</b>	<b>18W</b>	<b>4100</b>	<b>4'</b>	<b>&gt;80</b>	<b>2000</b>

• -X = Ballast and Line Compatible

• -B = Ballast Only

• -L = Line Only