

# A19 9W DIM. GU24 TITANIUM LED CRI<sup>SP</sup> SERIES



PRO



9W REPLACES




60W Inc.

80% Energy Savings

\$147 Savings per lamp\*

- Exceptional color rendering CRI 92
- Richer reds and natural skin tones (R9 70, R13 95)
- Tight LED binning for consistent CCT across all lamps
- High efficacy 89 LPW in Soft White
- Omnidirectional beam angle
- Suitable for use in totally enclosed fixtures



LM 79

LM 80


TM 21




## A19 PRODUCT FEATURES

### Suitable for Enclosed Fixtures

This A19 is suitable for use in totally enclosed fixtures and capable of operating in a broad range of applications. Whether it is installed in fully enclosed flushmounts or sconces, this lamp's advanced thermal design ensures optimal performance over the course of its lifetime.



### Exceptional Color Rendering

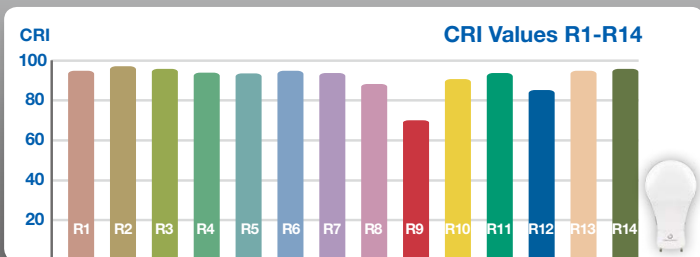

THE CRI<sup>SP</sup> SERIES A19 9W GU24 lamp features a typical CRI 92, R9 70 and R13 95, providing crisp and vibrant colors across the whole spectrum. Its exceptional R9-R14 values (R9 & R13) provide redder reds, natural looking skin tones and whiter whites. In addition, this lamp's color temperatures fall within a 4-step Macadam ellipse to ensure minimal color deviation across lamps.

# A19 9W GU24 DIM. TITANIUM LED CRI<sup>SP</sup> SERIES



## APPLICATIONS

### General Lighting



### Downlighting



### Uplighting



Ref.#: DS230-A19-9W-GU24-230517

## SPECIFICATIONS

Product Model	97911 9A19DIM/927/GU24
Type	A19
Base	GU24
Power (W)	9
Voltage - Frequency	120V 60Hz
Color Temp. (ANSI)	Soft White 2700K
CRI (Ra) (typ.)	92
R9 / R13 (typ.)	70 / 95
Typical lumens (lm)	800
Efficacy (LPW)	89
Beam Angle	240°
Dimmable	Yes***
Power Factor	0.9
Rated Lifetime - L70 (hrs.)	30,000
Dia. x MOL	2.44"x4.45"(62x113mm)
Weight (lb. / g)	0.25lb. / 113g

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000-hr lifetime, \$20 LED with 30,000-hr lifetime  
 \*\* Suitable for use in totally enclosed fixtures

\*\*\* List of tested dimmer switches available on website  
 \*\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water