

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Intended for mounting heights up to 16' requiring low to medium light levels. Ideal for light duty task lighting, utility, storage rooms or retail.

**CONSTRUCTION** — Channel constructed of die-formed cold rolled steel. Sturdy combination reflector and channel cover constructed of die-formed cold rolled steel and secured by quarter-turn latch for easy access to wire-way. Screw on endplates. Accepts plug-in option for 1, 2 or 3 primary circuits.

**FINISH** — Five-stage iron phosphate pretreatment ensures superior paint adhesion and corrosion-resistance. Reflector and channel finished with a high-gloss baked white enamel.

**OPTICS** — Solid top or apertured 8% uplight available. Both reflectors are die-embossed.

**ELECTRICAL** — MVOLT ballasts are NEMA Premium®/CEE qualified ballasts. Full light output - reduced energy. Less than 10% THD. Multi-volt operation, 120-277V.

**120V ballasts are ENERGY STAR® qualified FCC Class B for residential and commercial applications. Less than 10% THD. Quieter applications.**

**INSTALLATION** — For unit or row installations, surface or suspended mounting.

**LISTINGS** — 120V, 277V and MVOLT are UL Listed and CSA Certified (standard). 347V is CSA Certified (see Options). NOM Certified (see Options). Suitable for damp locations.

**WARRANTY** — 1-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)


NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

# General-Purpose Industrials



### Specifications

Length:	24 (61.0)
	48 (121.9)
	96 (243.8)
Width:	12" (30.5)
Depth:	4" (10.2)



## ORDERING INFORMATION


Catalog Number	UPC	Description	# of Lamps	Length	Wattage	Voltage	Ballast Type	ENERGY STAR® Qualified	Lamp Included	Pallet Qty.	Standard Carton Qty.
L232 MV	745975276394	T8 general-purpose industrial	2	48"	32	120-277	Electronic, instant start	N	N	51	1
TL232 MV	745975276387	T8 general-purpose industrial	4	96"	32	120-277	Electronic, instant start	N	N	51	1
L296	745973858325	T12 general-purpose industrial	2	96"	75	120	Electronic, rapid start	N	N	51	1

# General-Purpose Industrials

## DIMENSIONS

Inches (centimeters).

Subject to change without notice.

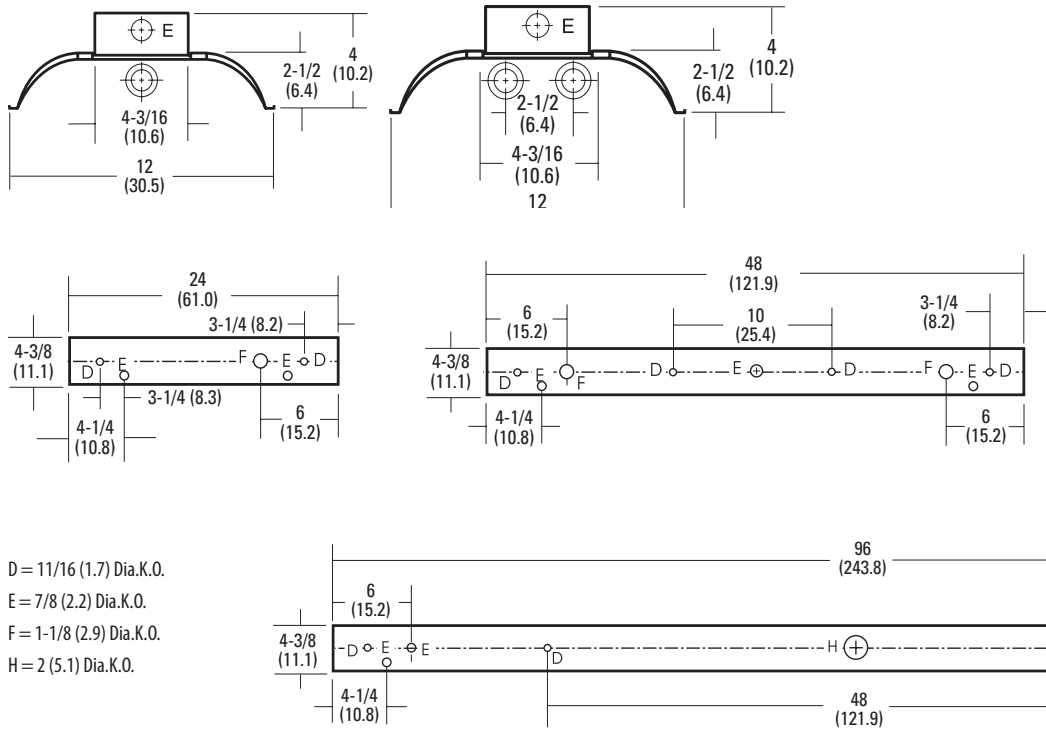

D = 11/16 (1.7) Dia.K.O.

E = 7/8 (2.2) Dia.K.O.

F = 1-1/8 (2.9) Dia.K.O.

H = 2 (5.1) Dia.K.O.

## PHOTOMETRICS

See [www.acuitybrands.com](http://www.acuitybrands.com).