

## FEATURES & SPECIFICATIONS

**INTENDED USE** — LBL LED wraparound provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. The LED system delivers long life and excellent color to ensure a quality, low-maintenance lighting installation. Ideal for closets, storage rooms, hallways, and offices.

**CONSTRUCTION** — Metal parts are die formed from code-gauge steel. Prismatic diffuser is 100% acrylic with sonically welded luminous ends. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance.

Finish: Five-stage iron phosphate pretreatment assures superior paint adhesion and rust resistance.

Painted parts finished with high-gloss, high-reflectivity baked white polyester enamel (low VOC).

**OPTICS** — Curved prismatic diffuser with linear side prisms and highly transmissive overlay minimizes lamp image and provides high-angle brightness control. Luminous end plates soften appearance for improved aesthetics.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

LED drivers deliver dimming from 0-10V control signal.

**LISTINGS** — CSA certified to U.S. and Canadian standards. Damp listed.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.


# LBL LED Low-Profile Curved-Basket LED Wraparound

2' and 4'  
LED



### Specifications

Length: 24 (61.0)  
48 (122.0)  
Width: 10 (25.4)  
Depth: 2-3/4 (7.0)




All dimensions are inches (centimeters) unless otherwise indicated.

### MOUNTING DATA

**Individual Installation** —  
Two single-stem hangers required.

**Row Installation** —  
One hanger per fixture plus one row required.

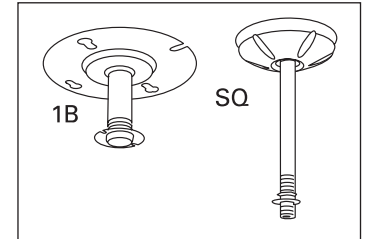

### ORDERING INFORMATION

See LBL Configurable specification sheet for additional lumen packages and control options.

Catalog number	UPC	Description	Lumens	Color temperature	Lens type	Voltage	Wattage <sup>2</sup>	Pallet qty	Standard carton qty.
LBL2 LP835 <sup>1</sup>	190887819380	2' LED Wraparound	2,014	3500 K	Patterned #12 acrylic	120-277	17	112	1
LBL2 LP840 <sup>1</sup>	190887819397	2' LED Wraparound	2,046	4000 K	Patterned #12 acrylic	120-277	17	112	1
LBL4 LP835 <sup>1</sup>	190887819199	4' LED Wraparound	4,188	3500 K	Patterned #12 acrylic	120-277	32	56	1
LBL4 LP840 <sup>1</sup>	190887819359	4' LED Wraparound	4,253	4000 K	Patterned #12 acrylic	120-277	32	56	1
LBL4 347 LP835	190887856682	4' LED Wraparound	4,188	3500 K	Patterned #12 acrylic	347	32	56	1
LBL4 347 LP840	190887856705	4' LED Wraparound	4,253	4000 K	Patterned #12 acrylic	347	32	56	1

### Notes

- Product in stock.
- All values are design or typical values, measured under laboratory conditions at 25°C.