

# LED

## Panels

# PLT



### FEATURES

- USA approved LM-80 SMD
- UL DLC LM79 certified
- Input Voltage: 100-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 50%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 50,000 hours
- UL# E485624 - DLC# PLTB33331



**50% ENERGY EFFICIENCY & LONG LIFE**

TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

<b>LEDF-10158</b>	<b>3500</b>	<b>4000</b>	<b>2X4</b>	<b>40</b>	<b>100-277</b>	<b>YES</b>	<b>CEILING</b>	<b>50000</b>	<b>5 years</b>
-------------------	-------------	-------------	------------	-----------	----------------	------------	----------------	--------------	----------------

## ADDITIONAL PHOTOS



## FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

## TYPICAL APPLICATIONS

- Schools, Factories, Hotels
- Office, Conference Rooms
- Hospitals


## WARRANTY

Warranty

5 Years

## SPECIFICATIONS

Dimmable .....	Yes
DLC Listed .....	Yes
Safety Rating .....	UL
CRI .....	80
Color.....	Halogen White
Color Temperature.....	3500 Kelvin
Life Hours .....	50,000
Wattage .....	40 Watt
Lumens.....	4000
Voltage .....	100-277
Finish.....	White
Housing .....	Aluminum
Mounting .....	Ceiling Grid Mount/Suspended
Lens .....	Opaque
Length .....	47.75 in.
Height .....	1.9 in.
Width .....	23.7 in.
Weight.....	14 lbs.
Warranty.....	5 Years

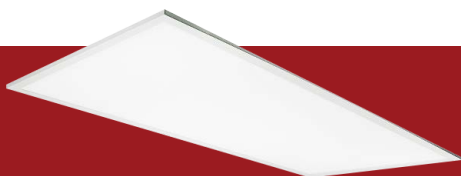

## PHOTOMETRICS

