

LED

Panels

PLT



FEATURES

- USA approved LM-80 SMD
- UL DLC LM79 certified
- Input Voltage: 120-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 50%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 50,000 hours
- UL File Number - E485624
- DLC Listed - PLTB33311



50% ENERGY EFFICIENCY & LONG LIFE

TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

LEDF-10159	4000	5000	2X4	40	120-277	YES	CEILING	50000	5 years
-------------------	-------------	-------------	------------	-----------	----------------	------------	----------------	--------------	----------------

ADDITIONAL PHOTOS

FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

TYPICAL APPLICATIONS

- Schools, Factories, Hotels
- Office, Conference Rooms
- Hospitals


WARRANTY

Warranty



5 Years

SPECIFICATIONS

Dimmable	Yes
DLC Listed	Yes
Safety Rating	UL
CRI	80
Color	Cool White
Color Temperature	4000 Kelvin
Life Hours	50,000
Wattage	40 Watt
Lumens	5000
Voltage	120-277
Finish	White
Housing	Aluminum
Mounting	Ceiling Grid Mount/Suspended
Lens	Opaque
Length	23.7 in.
Height	0.45 in.
Width	47.75 in.
Weight	14.1 lbs.
Warranty	5 Years

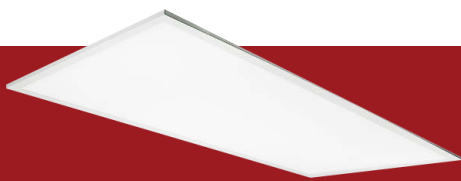

PHOTOMETRICS

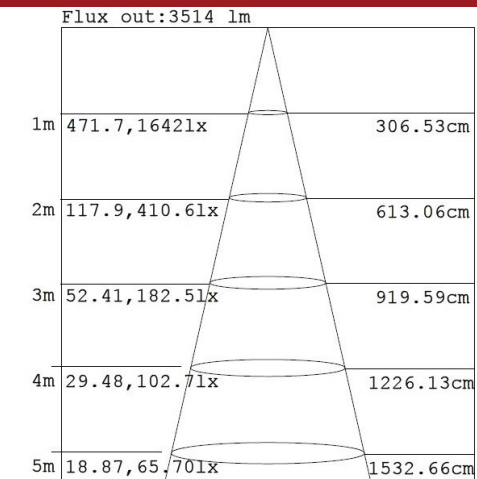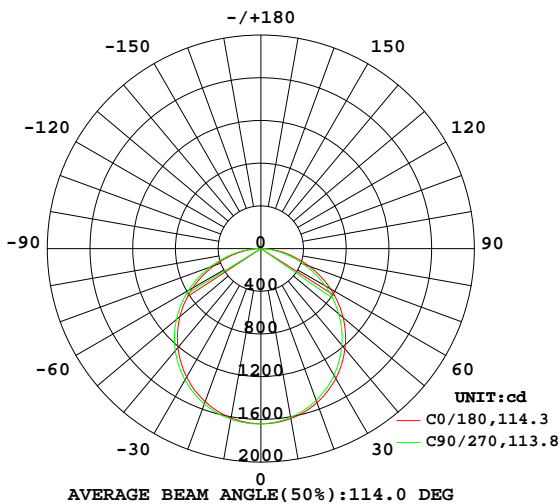

Height Eavg, Emax Angle: 113.75deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.