


LED Disk Light

DIMENSIONS

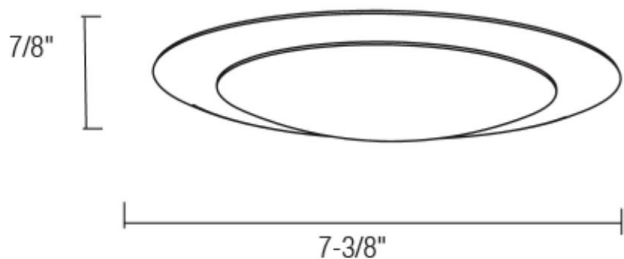

APPLICATION

The LDL2 Series LED disk light provides versatile lighting on standard line voltage, yet produces the high energy savings you desire from LED fixtures. The LDL2 series allows for easy upgrade your down-lighting from the traditional recessed cans to a more modern looking, energy efficient solution. This disk light can be easily mounted onto a junction box or can be retrofitted into an existing recessed can with the optional hardware mounting adapter (not included).

FEATURES

- High-transmission (White) Acrylic lens with excellent distribution and uniformity.
- Full distribution LED Luminaire
- 120V AC with Driver on Board Technology. 10-100% triac dimming, compatible with most triac dimming switches in the market
- Designed for a 50,000 Hour Life
- Available in 3000K or 4000K Kelvin temperatures
- Environmentally friendly - contains no mercury or other hazardous materials

CONSTRUCTION

Aluminium spun reflection with diffusion lens for official visual comfort while providing optional light output. Lens design and materials provide uniform appearance without pixilation

INSTALLATION/MOUNTING

Designed for mounting on 4" electrical J-Box.

ELECTRICAL

Equipped standard with 120V 15-100% triac dimming driver operating at 60Hz.

CERTIFICATION

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Adheres to LM70, LM80, and TM21 industry standards. Dedicated 120V Models are FCC Title 24 CFR, Part 15, Class B for residential and commercial applications. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

WARRANTY

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

ORDERING INFORMATION

Example Model Number: LDL2-6-15-120D-930-WH

LDL2	6	15	120D	930	WH
SERIES	DIAMETER	RATED WATTAGE	DRIVER TYPE	CRI AND KELVIN	FINISH
	4-4" ^{1 2} 6-6" 9-9" ¹	4" Housing 11- 11W (750 Lumens) ^{1 2} 6" Housing 15-15W (1100 Lumens) 9" Housing 20- 20W (1700 Lumens) ¹ 27- 27W (2000 Lumens)	120D- 120V, Triac Dimming 277D- 277V ¹	930-90 CRI; 3000 Kelvin 940-90 CRI; 4000 Kelvin ^{1 2}	NS- Nickel Satin ORB-Oil Rubbed Bronze WH- White

Notes:

¹Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

²DLC Premium Listed

³Quick ship: 3000K. Other CCTs may require a lead time or be a special order.

⁴Typical color consistency, may vary or be changed.

⁵L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire