

LED Vapor Tight Fixture




FEATURES


- Surface mount bracket and pendant mount not included
- Energy efficient, replaces high wattage HID fixtures
- Ambient temperature of the installation location -4°F to 104°F
- IP65 rated, dust-tight and water resistant
- Diffuser lens reduces glare



POLAR CANDELA DISTRIBUTION

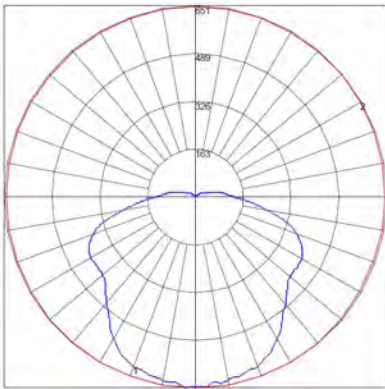


DIMENSIONS

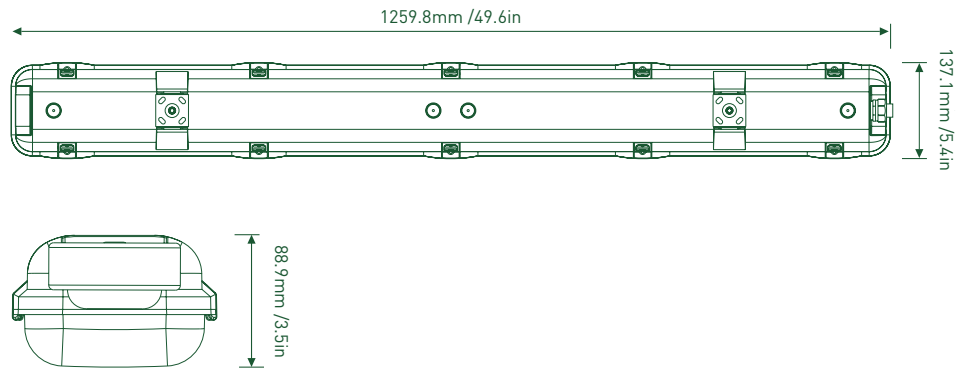

| SKU# | Kelvin | Lumens | Size | Wattage | Voltage | DLC? | Mounting | Life Hours | Warranty |
|-----------|--------|--------|-------|---------|---------|------|-------------------|------------|----------|
| PLT-11214 | 4000 | 2300 | 4 ft. | 23 | 120-277 | NO | Surface/Suspended | 75,000 | 5 Years |

ADDITIONAL PHOTOS

CCT



4000K 'white' color temperature as standard.

